

Research Result

An Automatic Fall-back based Handover Mechanism for Future Generation Wireless Networks

Prof. Girish Kumar Tiwari¹, Deepika Surve²

¹Associate Professor, Department of Electronics and Communication Engineering, UEC Ujjain (M.P.), INDIA

²Research Scholar, Department of Electronics and Communication Engineering, UEC Ujjain (M.P.), INDIA

ABSTRACT

With increasing number of users and multimedia applications, bandwidth efficiency in cellular networks has become a critical aspect for system design. Bandwidth is a vital resource shared by wireless networks. Hence, it's in critical to enhance bandwidth efficiency. Orthogonal Frequency Division Multiplexing (OFDM) and Non-Orthogonal Multiple access (NOMA) have been the leading contenders for modern wireless networks. NOMA is a technique in which multiple users' data is separated in the power domain. A typical cellular system generally has the capability of automatic fallback or handover. In such cases, there can be a switching from one of the technologies to another parallel or co-existing technology in case of changes in system parameters such as Bit Error Rate (BER) etc. In the proposed approach NOMA with successive interference cancellation is proposed. Moreover, a handover between NOMA and OFDM has been designed with automatic fallback enabled receivers. The condition for switching or handover has been chosen as the BER of the system. A comparative analysis with existing work shows improved performance as compared to existing techniques in terms of SNR requirement thereby making the system more practically useful for fading channel conditions.

KEYWORDS

Automatic Fallback, Quality of Service, Future Generation Wireless Systems, Bit Error Rate

1. INTRODUCTION

Multiplexing remains a serious challenge even today with the limited amount of available bandwidth and the increasing number of users in cellular networks. It is estimated that with the complete onset of 5G systems globally, the number of users will increase manifold [1]. This would require more advanced multiplexing techniques to be used for the purpose of sharing a common channel among users. Off late, OFDM has been the go-to multiplexing technique and has been used in several wireless technologies [2]. However, Non-Orthogonal Multiple Access (NOMA) has gained a lot of attention as the future of multiple access techniques. Ubiquitously used variants of multiplexing happen to be FDM, OFDM and TDM [3]. However, NOMA owing to its effective spectral efficiency is sought after as the next generation multiple access technique. As in frequency division multiplexing and time division multiplexing, the signals of different users are separated in the frequency and time domains respectively, the signals in NOMA based multiple access, separation occurs in terms of the power value [4] One of the concerning issues however lies in the detection of the NOMA signal at the receiving end with the separation of the different user signals in the case of multipath propagation and small-scale fading effects [5].

2. MULTIPATH PROPAGATION AND CHANNEL GAIN

The problem with wireless communication is the random nature of wireless channel and the mobility of users. While the random nature of wireless channel creates distortions in the received signal, the mobility of users results in fading effects and signal degradation [6]. Typically, these two-effect act in conjugation and result in degradation in the Quality of Service (QoS) of the system, which can be evaluated in terms of the latency, interference and bit error rate of the system [7]. Practical channels do not follow the conditions for distortion less transmission given by:

$$\text{mod}(H(f)) = k \quad (1)$$

Here,

H(f) is the channel frequency response

K is constant

After considering the multipath effects, it is convenient to understand the concept of successive signal detection and equalization. Practical wireless channels generally depict multi path propagation from different interacting objects (IOs) and hence show a discrete non-singular channel response [8].

The impulse response of such a channel can be modelled as:

$$h(t) = \sum_{i=1}^k \delta_i(t) \quad (2)$$

Here,

$H(f)$ is the impulse response of the channel

δ represents the impulse function

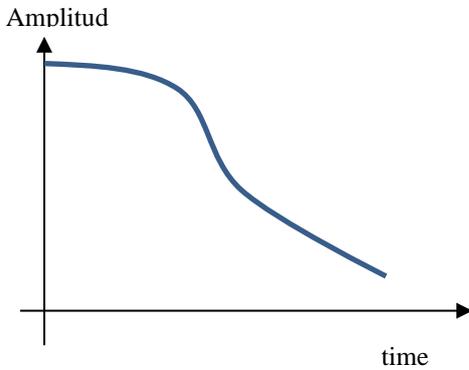


Fig.1 Signal Strength Variation in Multi-User Situations

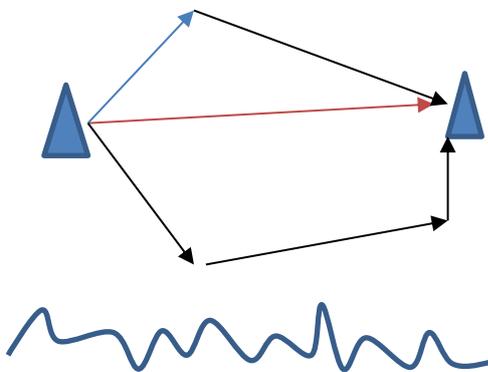


Fig. 2 Inter Symbol Interference (ISI) caused due to multipath propagation

The frequency domain counterpart of the channel impulse response is the channel frequency response $H(f)$ given by [9]:

$$H(f) = \int_{-\infty}^{\infty} h(t)e^{-j\omega t} dt \quad (3)$$

Here,

The operator represents the Fourier Transform

$H(f)$ is the channel in frequency domain

$h(t)$ is the impulse response of the channel

ω represents angular frequency

t is the time variable

3. PROPOSED HANDOVER MECHANISM BASED ON AUTOMATIC FALLBACK

Typically, even with the use of equalizers and inter-leavers, noise effects cannot be mitigated completely. They act as reduction mechanisms. Signal fading effects result in outages and poor quality of service. Hence alternatives to restore quality of service are sought [10].

One of the most effective techniques is the use of handover [11]. Vertical handovers refer to the automatic fall-over from one technology to another in order to maintain communication. In cellular communication, candidates with similar QoS performance can be considered for handover [12]. As far as 5G and onward technologies are concerned, OFDM and NOMA are suitable candidates due to their high spectral efficiency. In case NOMA is the preferred candidate, an automatic fall-back candidate can be considered to be OFDM. However, the choice of candidates to implement handover should satisfy the conditions of co-existence [13]

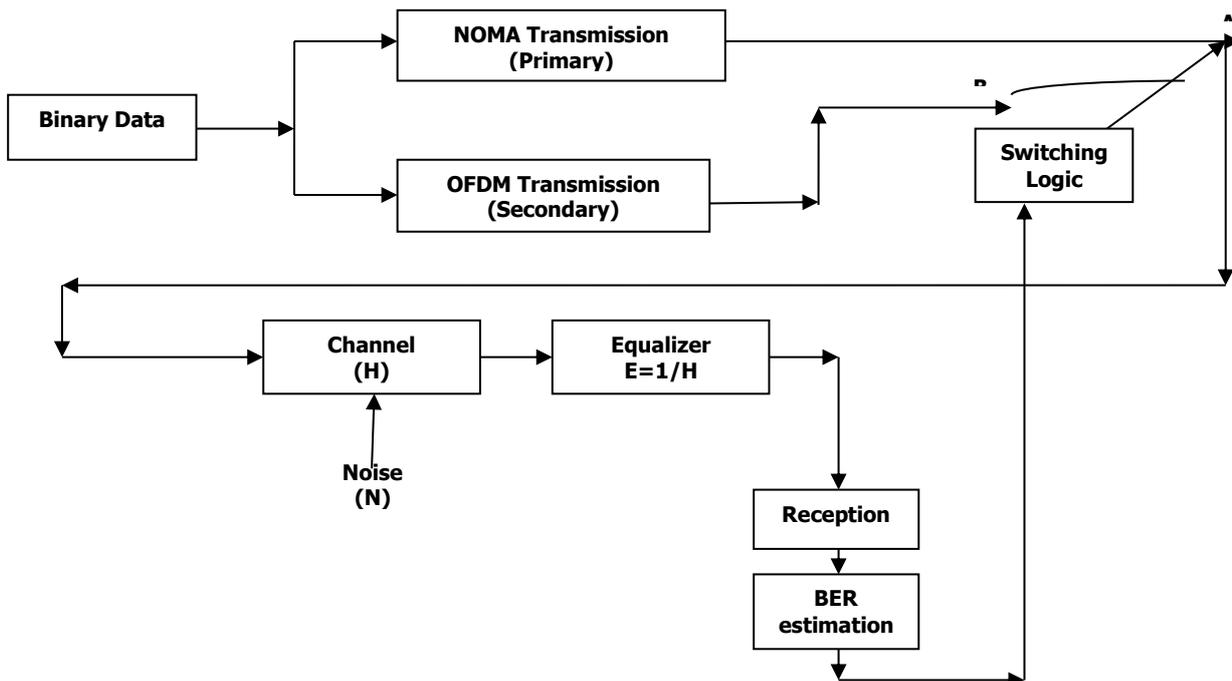


Fig. 3 Proposed Transceiver Design

Showing that an identical SNR-BER curve can be achieved using OFDM and NOMA, thereby can justify co-existence of NOMA-OFDM for a cellular network which can lead to a possible vertical handover in case of system requirements [14]. Non-identical BER performance in the SNR range would mean different characteristics for NOMA and OFDM thereby hindering handover [15]. Based on the Automatic Fallback approach, choose the system BER as the metric to decide upon handover. The transceiver design is depicted in figure 2.

To estimate the channel,

Compute the error in time domain as:

$$e(t) = y(t) - d(t) \text{ at the receiving end.}$$

Obtain $h(t)$ as:

$$h(t) = y(t) - e(t) \quad (4)$$

This process can be applied iteratively for samples over a period 'T'. Thus the samples of the equalizer (to be designed as a filter) can be given by:

$$h(t) = \sum_{i=1}^N h_i(t) \quad (5)$$

Finally, convert $h(t)$ in the frequency domain by evaluation of:

$$H(f) = \int_{-\infty}^{+\infty} h(t)e^{-j2\pi ft} dt \quad (6)$$

For reception of the signal, evaluate the following:

$$S_i = \text{sign}\{\text{real}[S_{\text{composite}}(t)]\} \quad (7)$$

$$S_q = \text{sign}\{\text{real}[S_{\text{composite}}(t)]\} \quad (8)$$

Here,

I represent the in-phase component

The flowchart of the proposed system shows the flow of control in the handover process.

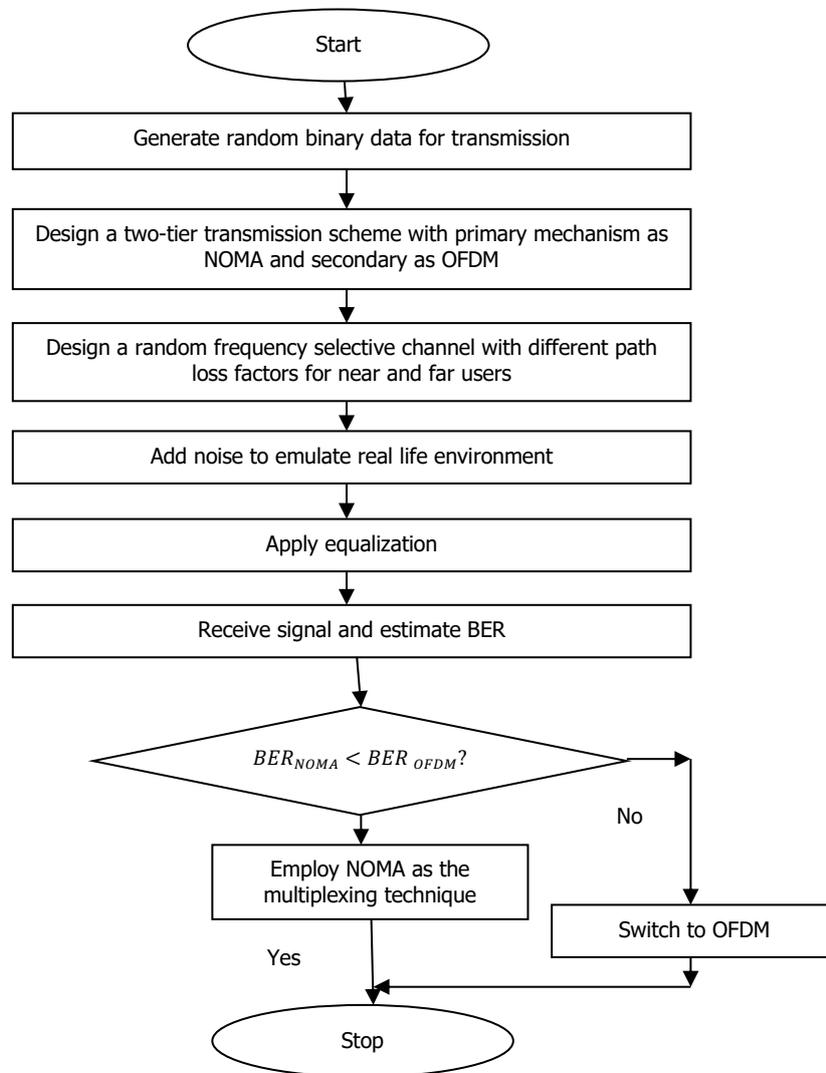


Fig. 4 Flowchart of proposed system

To, estimate the BER of the system for NOMA and OFDM,

if $(BER_{NOMA} < BER_{OFDM})$

{

Choose NOMA as the transmission technique

else

{

Fall back to OFDM

}

It has been discussed that a major challenge of NOMA based multiple access technique is the fact that small scale fading effects and multipath propagation make the amplitude of the power variable at the receiving end. This results in difficulty of separating the signals of different users with equal reliability. The error rate is the most common reliability metric and is defined as:

$$BER = \frac{\text{Number of Error Bits}}{\text{Total Number of Bits}} \quad (9)$$

Moreover, the BER depends on the SNR of the system mathematically which is given by:

$$P_{err} = f \left\{ Q \left[\sqrt{\frac{S}{N}} \right] \right\} \quad (10)$$

Here,

Q represents the Q function

S represents signal power

N represents noise power

4. EXPERIMENTAL RESULTS

The typical multi user detection mechanism has been developed in the proposed work.

The multipath propagation mechanism in the system generally comprises of:

- 1) LOS (ideal)
- 2) MPC for near users
- 3) MPC for far users.

The significance of the multipath propagation model is the fact that often the amplitude at the receiver keeps varying due to the fact that small scale fading is prevalent at the receiving end.

In this case,

- LOS travels d_1
- MPC 1 travels d_2
- MPC 2 travels d_3

Also,

$$d_1 < d_2 < d_3$$

Different users send their signals at different power levels. In general, the user farthest away from the receiver would face the most severe fading. On the contrary, the user nearest to the base station would face the least fading, Hence, the users can be categorized into 2 major categories which are:

- 1) Near User
- 2) Far User

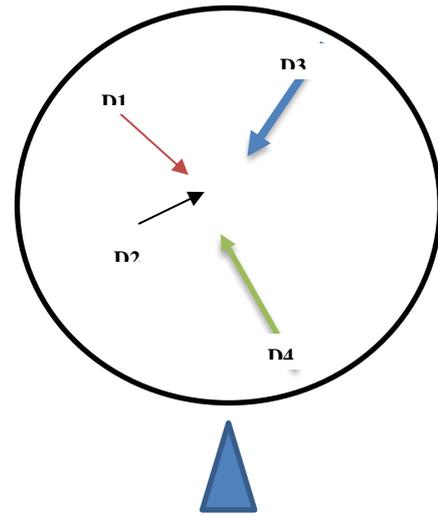


Fig.5 A typical MUD scenario.

The near and far user situation can be differentiated based on the path loss factor. The noise condition considered in this case is AWGN with a constant noise psd for all frequencies. Mathematically,

$$\text{Noise}_{psd} = \frac{N_0}{2} \forall f \quad (11)$$

Here,

psd represents the power spectral density

f represents frequency

$\frac{N_0}{2}$ represents the two-sided AWGN psd

Based on the automatic fall-back approach, choose the system BER as the metric to decide upon handover. For the near and far user scenario, we obtain the overlapping BER curves. The lesser among the two BER curves would be the technology to use. The results are presented subsequently.

The system is designed on MATLAB 2020a whose results are presented subsequently.

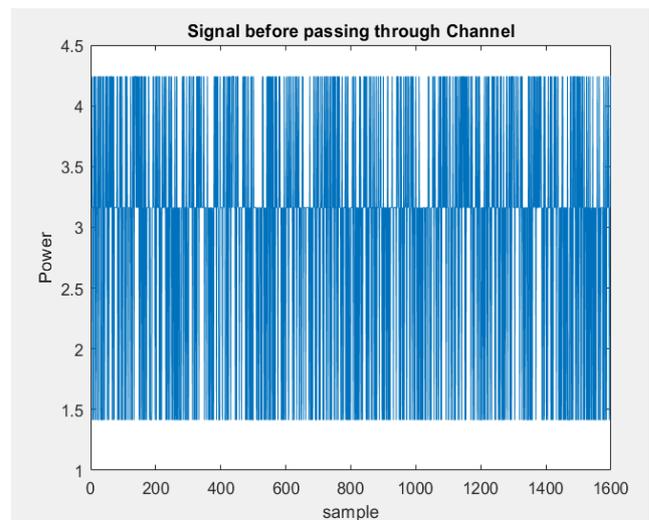


Fig. 6 Transmitted binary signal

The (AWGN) model does not adequately represent the channel for these modern applications. Moreover, the Line-Of-Sight (LOS) path between the transmitter and the receiver may or may not exist in such a channel.

Here,

psd represents the power spectral density

f represents frequency

$\frac{N_0}{2}$ represents the two-sided AWGN psd

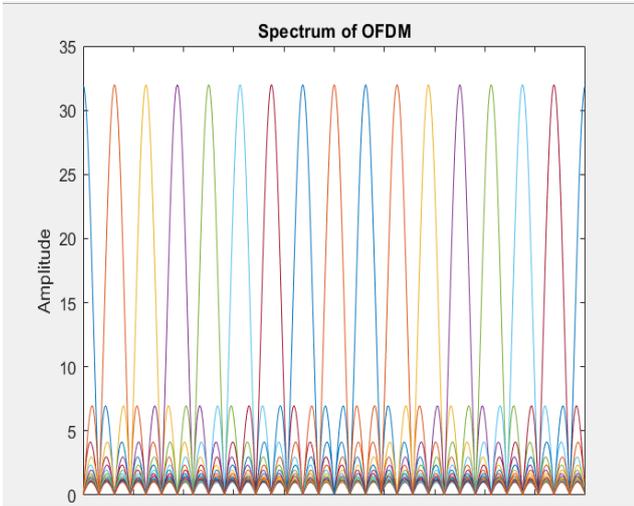


Fig. 7 Spectrum of OFDM

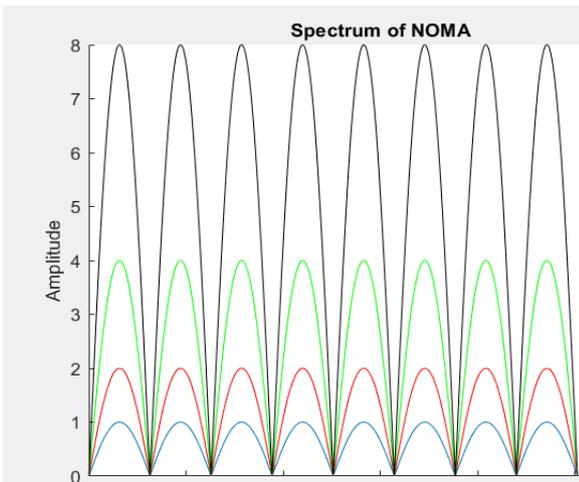


Fig. 8 Spectrum of NOMA

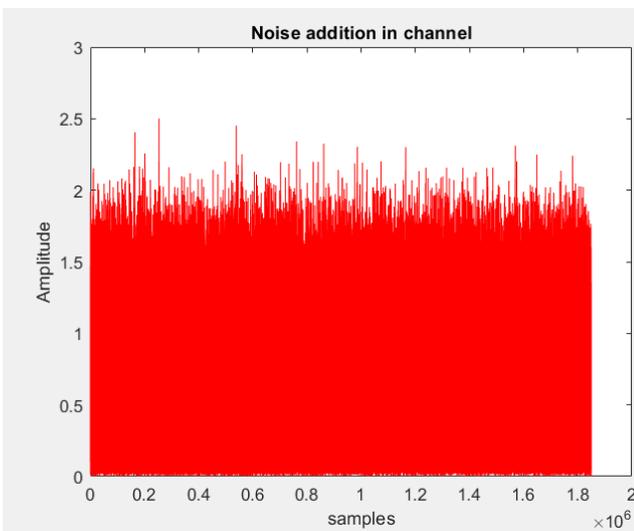


Fig. 9 Addition of Noise in the Channel

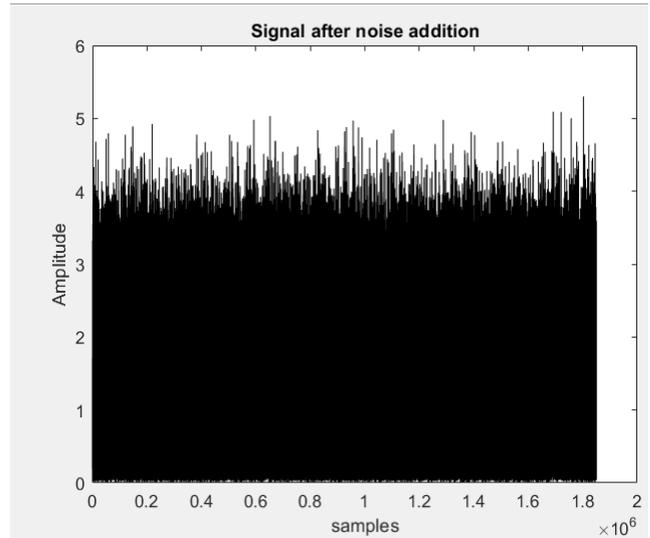


Fig. 10 Signal after passing through channel

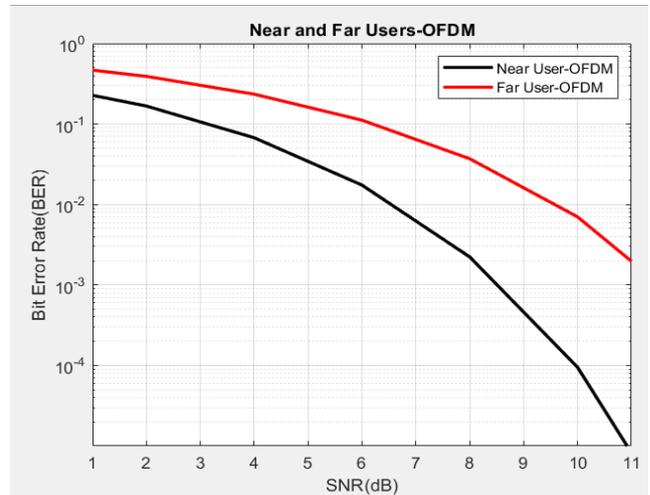


Fig. 11 Near and Far user condition for OFDM

The figure above depicts the BER performance for near and far users in OFDM. It can be seen that the far users have a higher BER compared to the near users.

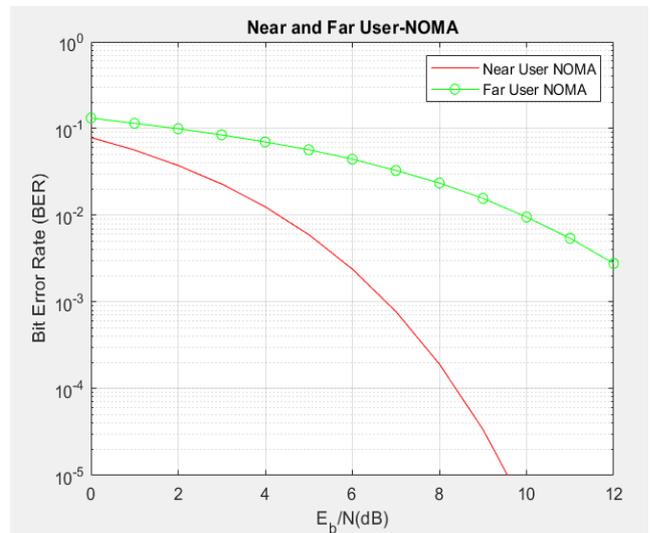


Fig. 12 Average user without proposed algorithm

The figure above depicts the BER performance for near and far users in NOMA. It can be seen that, as in the case of OFDM, for NOMA too the far users have a higher BER compared to the near users.

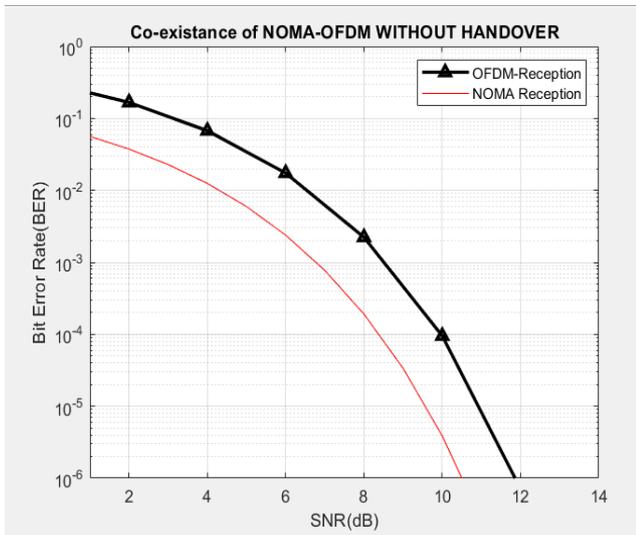


Fig. 13 Co-existence of NOMA-OFDM

The figure above shows the BER condition for the co-existence of NOMA and OFDM without the handover condition as the primary modulation scheme (NOMA) has a low BER metric value for the entire range of SNR.

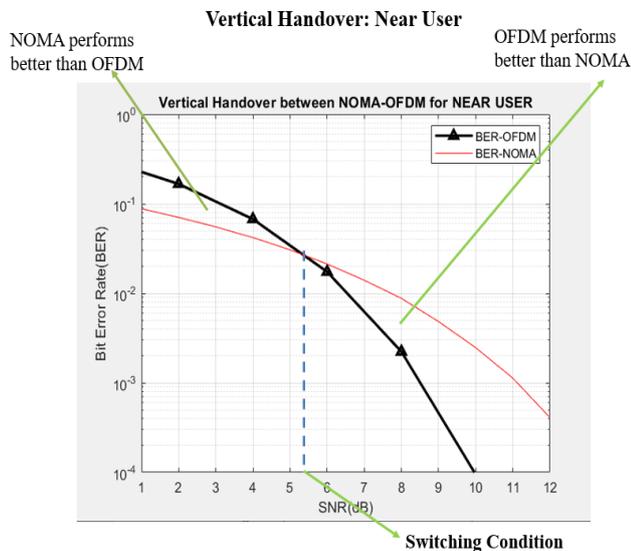


Fig. 14 Vertical handover for near user condition

The figure above shows the condition for switching among NOMA and OFDM for the near user scenario. It can be seen that prior to the intersection point, NOMA performs better while after the intersection point, OFDM performs better in terms of system BER.

The figure above shows the condition for switching among NOMA and OFDM for the far user scenario. A similar pattern is seen with the difference that the BER now falls slower compared to the near user condition implying the fact that SNR is relatively less.

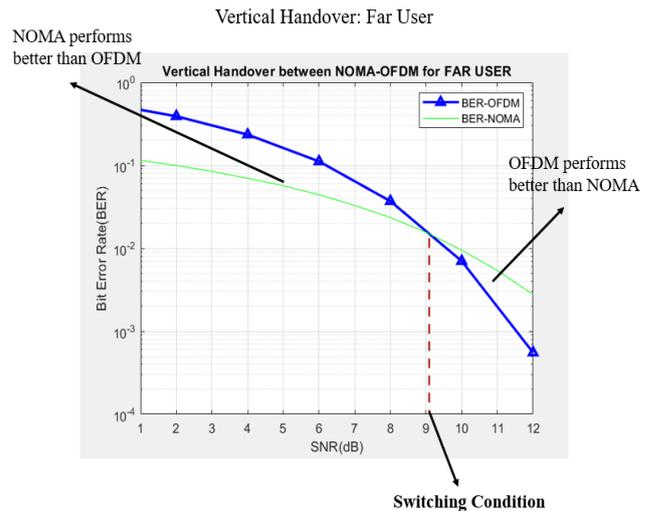


Fig. 15 Vertical handover for far user condition

5. CONCLUSION

It can be concluded from previous discussions that automatic fallback is necessary for practical wireless systems as multi-path propagation, fading effects and noise result in signal degradation and increase in the bit error rate of the system. In this work, a system is designed which employs automatic fallback between two contenders which are chosen as NOMA and OFDM. The BER is chosen as the switching parameter. It has been earlier shown that OFDM and NOMA can serve to be competing or parallel contenders for transmission. It has been shown that in case of non-intersecting BER curves, the condition remains to be that of non-handover since one of the techniques for transmission continuously outperforms the other in terms of the performance metric (BER). In case of handover, concurrent BER curves for OFDM and NOMA intersect to create a point of intersection. The region prior to and subsequent to the intersection point govern the technology to be used.

REFERENCES

- [1] A. Tusha, S. Doğan and H. Arslan, "A Hybrid Downlink NOMA With OFDM and OFDM-IM for Beyond 5G Wireless Networks," in IEEE Signal Processing Letters, 2020, vol. 27, pp. 491-495, 2020.
- [2] M.Hussain, H. Rasheed. "Nonorthogonal Multiple Access for Next-Generation Mobile Networks: A Technical Aspect for Research Direction". Hindawi-Wiley Wireless Communications and Mobile Computing vol. 2020, no.8845371, pp.1-17.
- [3] D. Surve, G. Tiwari, "A Comparative Review on Handover and Co-Existence among Multiplexing Techniques for Future Generation Wireless Systems with Automatic Fall-back.", iJournals: International Journal of Software & Hardware Research in Engineering (IJSHRE), 2022, vol.10, no.3, pp.56-62.
- [4] Y. Yapıcı and İ. Güvenç, "NOMA for VLC Downlink Transmission With Random Receiver Orientation," in IEEE Transactions on Communications, 2019, vol. 67, no. 8, pp. 5558-5573,
- [5] J Choi, J Mo, RW Heath, "Near maximum-likelihood detector and channel estimator for uplink multiuser massive MIMO systems with one-bit ADCs", IEEE Xplore- 2016, vol.64, no.5, pp. 2005-2018.

- [6] Maha Alodeh ; Symeon Chatzinotas ; Björn Ottersten, "Energy-Efficient Symbol-Level Precoding in Multiuser MISO Based on Relaxed Detection Region", IEEE Transactions on Wireless Communications, 2016, vol.15, no.5, pp. 3755-3767.
- [7] F. Monsees, M. Woltering, C. Bockelmann and A. Dekorsy, "Compressive Sensing Multi-User Detection for Multicarrier Systems in Sporadic Machine Type Communication," 2015 IEEE 81st Vehicular Technology Conference (VTC Spring), 2015, pp. 1-5.
- [8] Y. Song, P. Kong and Y. Han, "Power-Optimized Vertical Handover Scheme for Heterogeneous Wireless Networks," in IEEE Communications Letters, 2014, vol. 18, no. 2, pp. 277-280.
- [9] A. Ahmed, L. M. Boulahia and D. Gaïti, "Enabling Vertical Handover Decisions in Heterogeneous Wireless Networks: A State-of-the-Art and A Classification," in IEEE Communications Surveys & Tutorials, 2013, vol. 16, no. 2, pp. 776-811.
- [10] R. Tamijetchelvy and G. Sivaradje, "An optimized fast vertical handover strategy for heterogeneous wireless access networks based on IEEE 802.21 media independent handover standard," 2012 Fourth International Conference on Advanced Computing (ICoAC), 2012, pp. 1-7
- [11] X Shang, B Chen, HV Poor, "Multiuser MISO interference channels with single-user detection: Optimality of beamforming and the achievable rate region", IEEE Transactions on Information Theory, 2011, vol.57, no.7, pp. 4255-4273
- [12] H Zhu, GB Giannakis, "Exploiting sparse user activity in multiuser detection", IEEE Transactions on Communications, in IEEE Transactions on Communications, 2011, vol. 59, no. 2, pp. 454-465
- [13] S. Hong, "Multi-Resolution Bayesian Compressive Sensing for Cognitive Radio Primary User Detection," 2010 IEEE Global Telecommunications Conference GLOBECOM 2010, 2010, pp. 1-6.
- [14] TW Yune, CH Choi, GH Im, JB Lim, "SC-FDMA with iterative multiuser detection: improvements on power/spectral efficiency", IEEE Communications Magazine, 2010, vol. 48, no. 3, pp. 164 -171
- [15] D Angelosante, E Biglieri, M Lops, "Neighbor discovery in wireless networks: A multiuser-detection approach", Physical Communication, Elsevier 2010, vol.3, no.1, pp. 28-36.