

# Comparison of Second Law Efficiency of Halocarbon Refrigerants Ethane Series Influenced by Evaporator Temperature for Vapour Compression Refrigeration System

Pranjal Shrimali<sup>1</sup>, Prof. Ravi Upadhyay<sup>2</sup>

<sup>1</sup> M.Tech Scholar, <sup>2</sup> Assistant Professor

Department of Mechanical Engineering, Sushila Devi Bansal College of Technology, Indore MP (India)

**Abstract:** - An analysis is usually done to improve the system and find out the sites of work lost. The sites having high energy destruction indicates the scope of improvement in specific sites in order to achieve overall improved, efficient system. This research work investigates the losses involved in process and overall cycle due to irreversibility in vapour compression refrigeration system with evaporator temperature as influential parameter by energy destruction and second law efficiency analysis. The present work analyzed the behavior of six halocarbon ethane series refrigerants R-123, R-124, R-125 R-134a, R-143a and R-152a with variation of evaporator temperature. From second law efficiency increases with evaporator temperature and for R-123 almost constant  $\eta$  with increases evaporation temperature and also same  $\eta$  at temperature 233K (-40°C) comparison of R-134a.

**Keywords-** Energy Destruction, Work Lost, Irreversibility, Exergetic Efficiency, Second Law Efficiency, Vapour Compression refrigeration System.

## I. INTRODUCTION

Refrigeration is a process in which work is done to move heat from one location to another. [1] The work of heat transport is traditionally driven by mechanical work, but can also be driven by heat, magnetism, electricity, laser, or other means.

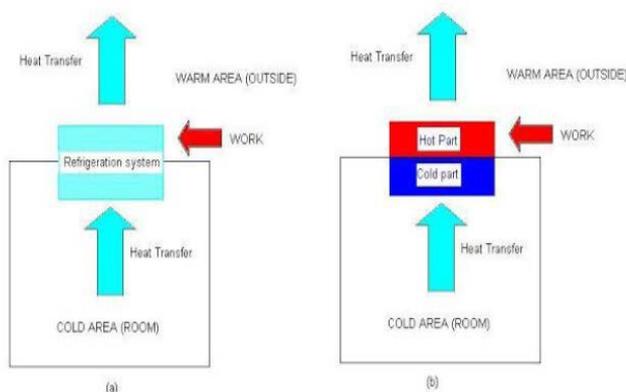


Fig.1 (a) Refrigeration system (b) Refrigeration system produces cold and hot part

Refrigeration has many applications including but not limited to household refrigerators, industrial freezers, cryogenics, [10] and air conditioning. Heat pumps may use the heat output of the refrigeration process, and also may be designed to be reversible, but are otherwise similar to refrigeration units. Energy efficiency under a specific operation condition [9] The Cool Pack is especially suitable for supermarket refrigeration analysis for which we have well-defined component performance and need to catch the main system characteristics while neglecting some effects. The energy efficiency under different operating conditions direct the refrigerant through a condenser and an evaporator of the refrigeration.

## II. SYSTEM MODEL

Refrigeration has a large impact on industry, lifestyle, agriculture and settlement patterns. The idea of preserving food dates back to the ancient Roman and Chinese empires. However, refrigeration technology has rapidly evolved in the last century, from ice harvesting to temperature-controlled rail cars. [4] The introduction of refrigerated rail cars contributed to the westward expansion of the United States, allowing settlement in areas that were not on main transport channels such as rivers, harbors, or valley trails. Settlements were also popping up in infertile parts of the country, filled with new natural resources. These new settlement patterns sparked the building of large cities which are able to thrive in areas that were otherwise thought to be unsustainable, such as Houston, Texas and Las Vegas, Nevada. In most developed countries, cities are heavily dependent upon refrigeration in supermarkets, [6] in order to obtain their food for daily consumption. The increase in food sources has led to a larger concentration of agricultural sales coming from a smaller percentage of existing farms. Farms today have a much larger output per person in comparison to the late 1800s. This has resulted in new food sources available to entire populations, which has had a large impact on the nutrition of society.

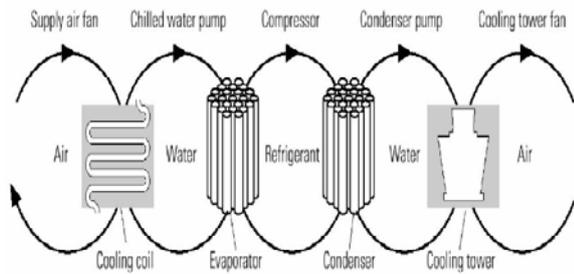


Fig.2.1 Heat Transfer Loop in Refrigeration System

There are several heat transfer loops in a refrigeration system as shown in Figure 2. Thermal energy moves from left to right as it is extracted from the space and expelled into the outdoors through five loops of heat transfer.

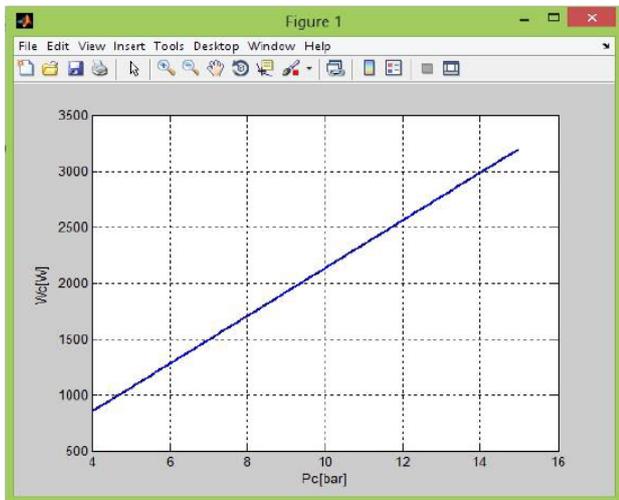


Fig.2.2 Compressor Power & Condenser Pressure

Optimization of condenser set points to minimise energy use requires a tradeoff between high compressor energy use at high head pressures and high condenser fan and [8] pump energy use to achieve low head pressures. Multi-speed fans and variable speed drive (VSD) fan controls only give significant energy use reductions compared with on/off control if [13] compressors operate highly unloaded and/or the condenser is grossly oversized. Oil separators, discharge and high pressure liquid lines, and expansion and other refrigerant control valves should be designed to operate satisfactorily across the full range of discharge pressures likely to be encountered if discharge pressure is floated. Most industrial refrigeration systems employ compressor discharge (head) pressure controls. Generally these controls modulate the condenser fans (for air-cooled or evaporative condensers) or water flow rates and cooling tower fans (for water-cooled condensers) to keep the head pressure within a specified range. Reducing fan speed or cooling water flow reduces the effective capacity of the condensers so that it equals the required heat rejection by maintaining a larger temperature difference between the refrigerant saturated condensation temperatures.

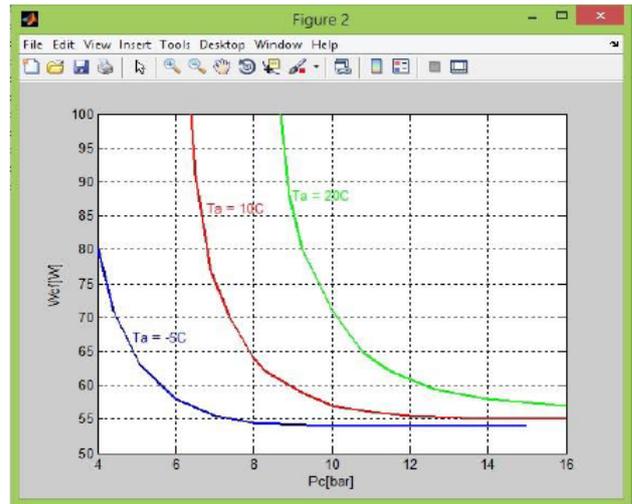


Fig.2.3 Condenser Fan Power & Condenser Pressure

### III. PROPOSED METHODOLOGY

The commonly referred to as the heart of the system, the compressor is a belt driven pump that is fastened to the engine. It is responsible for compressing and transferring refrigerant gas. [12] The A/C system is split into two sides, a high pressure side and a low pressure side; defined as discharge and suction. Since the compressor is basically a pump, it must have an intake side and a discharge side. The intake, or suction side, draws in refrigerant gas from the outlet of the evaporator. In some cases it does this via the accumulator. Once the refrigerant is drawn into the suction side, it is compressed and sent to the condenser, where it can then transfer the heat that is absorbed from the inside of the vehicle.

#### BD35DC12V/24V/36V

<b>Place of origin</b>	:	China (Mainland)
<b>Brand name</b>	:	Millie
<b>Application</b>	:	Refrigeration parts
<b>Type</b>	:	Refrigeration Compressor
<b>Displacement</b>	:	3.0 ml
<b>Refrigerant</b>	:	R-134 (a)
<b>Rotation (r.p.m.)</b>	:	2500/2750/3000
<b>Capacity (W)</b>	:	60-110
<b>Current (Amp)</b>	:	12V/6Amp. 24V/3.5 Amp.
<b>Input power</b>	:	60 W
<b>C.O.P</b>	:	1.3

#### Evaporator

The evaporator provides several functions. Its primary duty is to remove heat from the inside of your vehicle. A secondary benefit is dehumidification. As warmer air travels through the aluminum fins of the cooler evaporator coil, the moisture contained in the air condenses on its

surface. Dust and pollen passing through stick to its wet surfaces and drain off to the outside. On humid days you may have seen this as water dripping from the bottom of your vehicle. Rest assured this is perfectly normal. The ideal temperature of the evaporator is 32° Fahrenheit or 0° Celsius. [14] Refrigerant enters the bottom of the evaporator as a low pressure liquid. The warm air passing through the evaporator fins causes the refrigerant to boil (refrigerants have very low boiling points). As the refrigerant begins to boil, it can absorb large amounts of heat. This heat is then carried off with the refrigerant to the outside of the vehicle.

**Dimension = 30 cm x 41 cm x 28.5 cm**

**Total surface Area = 2(lw+wh+hl) = 6507 square cm**

The various types of sensors are used to measure temperature. One of these is the thermostat, or temperature-sensitive resistor.



Fig.3.1 Evaporating Coils

Most thermostats have a negative temperature coefficient (NTC), meaning the resistance goes up as temperature goes down. Of all passive temperature measurement sensors, [15] thermostats have the highest sensitivity (resistance change per degree of temperature change). Thermostats do not have a linear temperature/resistance curve.



Fig.3.2 Compressor Coils Winding

IV. EXPERIMENTAL RESULTS

Table: 4.1 Second law efficiency of different Refrigerants

Second Law Efficiency ( $\eta$ )						
Refrigerants	R-123	R-124	R-125	R-134a	R-143a	R-152a
Temperature range (Te→Tc) K						
243→313	0.834	0.674	0.54	0.852	0.826	≥1
233→313	0.835	0.66	0.503	0.838	0.797	≥1
223→313	0.832	0.645	0.466	0.824	0.766	≥1
213→313	0.83	0.63	0.427	0.809	0.736	≥1

Simulation

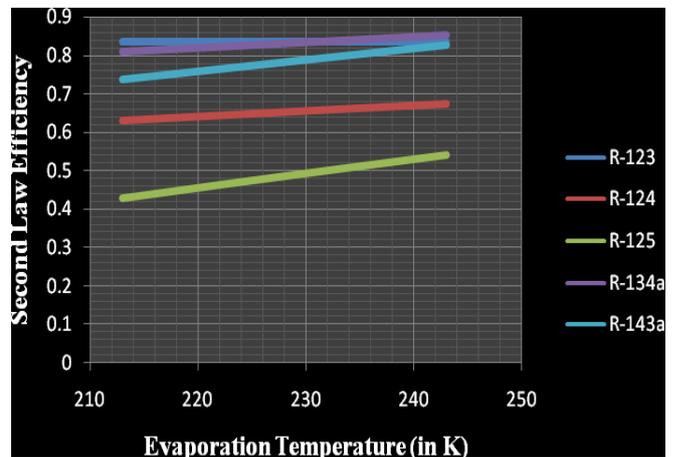


Fig: 4.2 Simulation of Second Law Efficiency with respect to Evaporation Temperature of different Refrigerants.

V. CONCLUSION

A comparative second law efficiency analysis of the different refrigerants impact on the operation and performances of a single stage vapor compression refrigeration system was presented. The effects of evaporating temperature and pressure on vapor compression refrigeration system studied on the operation and performances. Based on the theoretical and practical analysis destruction rates were estimated for each component of the system in a comparative manner for refrigerants. The evaporating temperature increases from (243→313) K then the second law efficiency of R-134a is higher as compared to other halocarbon refrigerants ethane series but the temperature range (223→313) K and (213→313) K of refrigerant R-123 has higher  $\eta^{nd}$  law efficiency as compared to other refrigerants.

REFERENCES

- [1] L. F. S. Larsen, "Model based control of refrigeration systems," Ph.D.dissertation, Aalborg University, Department of Control Engineering, 2005, PhD. Thesis.
- [2] T. Hovgaard, "Active sensor configuration validation for refrigeration' systems," Automation and Control, Technical University of Denmark, Tech. Rep., 2009, master's Thesis. [Online]. Available: <http://orbit.dtu.dk>
- [3] L. Larsen, R. Izadi-Zamanabadi, and R. Wisniewski, "Supermarket refrigeration system - benchmark for hybrid system control." Proc. European Control Conference, pp. 113–120., 2007.
- [4] L. F. S. Larsen, C. Thybo, and H. Rasmussen, "Potential energy savings optimizing the daily operation of refrigeration systems," Proc. European Control Conference, Kos, Greece, pp. pp. 4759–4764., 2007.
- [5] H. Rasmussen and L. Larsen, "Nonlinear superheat and capacity control of a refrigeration plant," 2009 17th Mediterranean Conference on Control and Automation, pp. 1072–1077, 2009.
- [6] M. Willatzen, N. Pettit, and L. Ploug-Sørensen, "A general dynamic simulation model for evaporators and condensers in refrigeration. Part I: moving-boundary formulation of two-phase flows with heat exchange," International Journal of Refrigeration, vol. 21, no. 5, pp. 398–403, 1998.[7] J. Maciejowski, Predictive control: with constraints. Pearson education, 2002.
- [8] J. B. Rawlings and D. Q. Mayne, Model Predictive Control: Theory and Design. Nob Hill Publishing, 2009.
- [9] D. Sarabia, F. Capraro, L. Larsen, and C. de Prada, "Hybrid nmpc of supermarket display cases," Control Engineering Practice, vol. 17, no. 4, pp. 428–441, 2008.
- [10] T. Hovgaard, K. Edlund, and J. Jørgensen, "The potential of economic for power management." Proc. Conference on Decision and Control, p. accepted, 2010.
- [11] J. Rawlings, D. Bonne, J. Jorgensen, A. Venkat, and S. Jorgensen, "Unreachable set points in model predictive control," IEEE Transactions on Automatic Control, vol. 53, no. 9, pp. 2209–2215, 2008.
- [12] M. Diehl, R. Amrit, and J. Rawlings, "A Lyapunov Function for Economic Optimizing Model Predictive Control," IEEE Transactions on Automatic Control, 2009.
- [13] J. Rawlings and R. Amrit, "Optimizing Process Economic Performance Using Model Predictive Control," Nonlinear Model Predictive Control: Towards New Challenging Applications, pp. 119–138, 2009.
- [14] K. Edlund, L. E. Sokoler, and J. B. Jørgensen, "A primal-dual interior-point linear programming algorithm for MPC," in Joint 48th IEEE Conference on Decision and Control and 28th Chinese Control Conference. Shanghai, P.R. China, December 16-18, 2009: IEEE, 2009, pp. 351–356.
- [15] A. Jakobsen and M. Skovrup, Forslag til energioptimal styring af kondenseringstryk (in danish)," MEK, Technical University of Denmark, Tech. Rep., 2001. [Online]. Available:<http://www.et.web.mek.dtu.dk/ESO/Index.htm>
- [16] Sharad Chaudhary and Rajesh Gupta "Performance analysis of refrigerant centrifugal compressor" volume 2 issue 7 July 2013.