

Double U-Slot Loaded Rectangle Patch Antenna for Communication System

Akashdeep Kumar¹, Prof. Manish Sahu²

¹M. Tech. Scholar, Department of Electronics and Communication, SORT, People's University, Bhopal, India

²Assistant Professor, Department of Electronics and Communication, SORT, People's University, Bhopal, India

Abstract: -In this paper a microstrip antenna loading with double U-slot loaded rectangle patch antenna is designed. Here, the shape of patch is rectangular and partial ground plane is used. The antenna designing is done by using HFSS simulation tool. Feeding is done by using microstrip feed line. After designing antenna we see the effect of variation in the dielectric material of substrate, width and length of U-shaped slot, feed position and ground plane variation on antenna bandwidth is analyzed. Finally, the proposed antenna design gives optimum impedance bandwidth of 10 GHz operating over a frequency range of 4.1 to 14.1 GHz with VSWR < 2. These characteristics make the designed antenna suitable for various ultra-wide band applications.

Keywords:-Microstrip Antenna, U-shaped slot, Partial ground plane, Ultra-wide band.

I. INTRODUCTION

Antennas are very important component in WiMAX and wireless communication system. There are different types of antennas exist practically which we used for transmit and receive EM waves. Out of these microstrip antenna is one of the most important antenna nowadays due to their attractive features such as low profile, light weight, low cost and ease in fabrication. Therefore, they are compatible with wireless communication integrated circuitry. But it has some disadvantages such as narrow bandwidth, low gain and low efficiency. There are some drawbacks in order to reduce these drawbacks such as slot loading over patch, reduction in length of ground plane etc. [1-2].

Federal Communication Commission (FCC) allocated a bandwidth of 7.5 GHz i.e. from 3.1 GHz to 10.6. It is generated by very short duration pulses generally in picoseconds therefore it provides very high data rate in the range of Mbps. There are several advantages of short duration pulses like it avoids multipath fading etc. This is widely used in radars and remote sensing applications. UWB antennas having return loss ($S_{11} < -10\text{dB}$) high radiation efficiency over ultra-wide band from 3.1 GHz to 10.6 GHz [3-5].

In the present paper, a double U-slot loaded rectangular patch microstrip antenna is designed and analyzed. Two U-slots reduce the overall impedance of antenna. The slot reduces the area of copper sheet which leads to less value of quality factor hence bandwidth increases. The microstrip

line is used for feeding because of its ease in fabrication and simple to match by controlling inset positions. A VSWR < 2 and $S_{11} < -10\text{ dB}$ is achieved for a frequency range of 6.5-14.8 GHz with stable E- and H-plane radiation patterns. Now, figure 1 shows the antenna design.

The entire paper has been partitioned into five parts. In II, literature reviews for microstrip patch antenna have been discussed. In III, antenna design for double U-slot rectangle patch antenna hardware structure is discussed. In IV, result and discussion has been discussed. In V, conclusions and future scope of the paper work has been presented.

II. LITERATURE REVIEW

Ref. [2], proposed ultra-wideband microstrip antenna. In this paper, size of the substrate is 70mm*60 mm and use RT/Duriod 5870 substrate with dielectric constant $\epsilon = 2.33$ and height $h = 0.79\text{ mm}$. Ref. [3], proposed compact microstrip antenna for ultra-wideband applications. The fabricated antenna consists of a rectangular patch tapered from a microstrip feeding structure and a truncated ground plane. Ref. [4], studied about the effect slot loading in a rectangular microstrip antennas. In this paper, first conventional microstrip antenna is designed which operates at frequency of 4 GHz. Ref. [6], proposed compact rectangular L-shaped slot microstrip antenna for UWB applications. An ultra-wideband (UWB) microstrip antenna with half U-slot is analyzed using equivalent circuit model based on modal expansion cavity model. The effect of slot length, slot width and distance between feed point allocation and slot are analyzed to obtain the optimum for UWB operation of the antenna. Antenna shows a lower frequency band 3.262 GHz to 5.389 GHz (22.73) and upper operational frequency band 5.869 GHz to 9.033 GHz (47.69%). Results of the proposed antenna are in good agreement with the simulated results.

III. ANTENNA DESIGN

In this paper, antenna is designed by using ANSOFT HFSS (High Frequency Structural Simulator) [4]. Method of finite element solver is used. Rectangular patch is 11.964 mm wide and 16 mm long. Dielectric material of substrate is varying and it is 30 mm wide and 30 mm long and height of the substrate is 1.5 mm. We take different

types of substrate such as glass, FR4 epoxy, mica and Bakelite. Feeder position is varied at 0 mm, 1.5mm, 2.5 mm from the symmetrical position. . Ground plane is partial providing good impedance match with width 30mm and varying length. At different lengths of partial ground plane i.e. 7mm, 7.4mm, 7.8mm, 8mm, 8.4mm, 8.8mm and 9mm, effect on antenna bandwidth is observed. Double U-shaped slot is used to decrease the overall impedance. It provides good impedance matching and higher bandwidth.

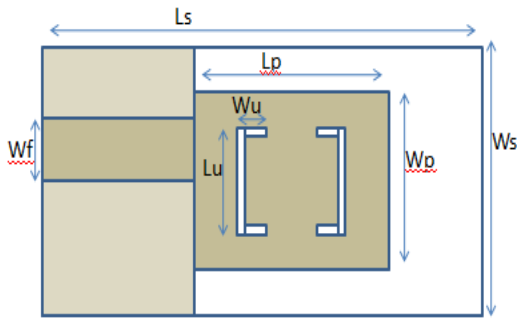


Figure 1: Design of Double U-slot loaded Rectangle Patch Microstrip Antenna

Table 1: shows the dimension of various parameters of antenna.

S.No	Parameters	Dimensions	Material
1	Substrate	W _{sub} =30 mm L _{sub} =30 mm H _{sub} = 1.6mm	Varying
2	Rectangular patch	L _p = 16 mm W _p = 11.964mm	Copper
3	Ground Plane	W _g = 16 mm L _g = varying	Copper
4	U-Slot	L _{HS} = Varying W _s = Varying	-
5	Feed line	W _f = 3.01mm L _f = 8 mm	Copper

Width of microstrip antenna is simply given as

$$W = \frac{c}{2f_0 \sqrt{\frac{\epsilon_r + 1}{2}}} \quad (1)$$

Where,

W= Width of Patch

ϵ_r = Dielectric constant of the substrate

Actual length of microstrip antenna is given as

$$L_{actual} = L_{eff} - \Delta L \quad (2)$$

Where,

L_{eff} = Effective length of the patch.

ΔL = Extended electrical length

Effective length of the patch is simply given by

$$L_{eff} = \frac{c}{2f_0 \sqrt{\epsilon_{eff}}} \quad (3)$$

Where,

ϵ_{eff} = Effective dielectric constant

For low frequencies the effective dielectric constant is essentially constant. At intermediate frequencies its values begin to monotonically increase and eventually approach the values of dielectric constant of the substrate. Its value is given by,

$$\epsilon_{eff} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left[1 + 12 \frac{h}{W} \right]^{-1/2} \quad (4)$$

h = thickness of the substrate

In microstrip antenna, radiation occurs due to the fringing effects. Due to fringing effects electrical length of patch is greater than its physical length. This fringing depends on the width of patch and height of substrate [7]. Now the extended electric length is given by

$$\Delta L = 0.412h \frac{(\epsilon_{eff} + 0.3) \left(\frac{W}{h} + 0.264 \right)}{(\epsilon_{eff} + 0.3) \left(\frac{W}{h} + 0.8 \right)} \quad (5)$$

The width of microstrip line in microstrip antenna is given as follows:

For

$$\frac{W_{eff}}{h} \geq 2$$

$$W_{eff} = \frac{2h}{\pi} \left\{ \frac{\epsilon_r - 1}{2\epsilon_r} \left[\ln(B - 1) + 0.39 - 0.61 \frac{61}{\epsilon_r} \right] + B - 1 - \ln(2B - 1) \right\}$$

And for

$$\frac{W_{eff}}{h} \leq 2$$

$$W_{eff} = \frac{8he^A}{e^{2A} - 2} \quad (6)$$

$$W_f = W_{eff} - \frac{t}{\pi \left[1 + \ln \left(\frac{2h}{t} \right) \right]} \quad (7)$$

Where, A and B are given as follows

$$A = \frac{Z_{0t}}{60} \left(\frac{\epsilon_r + 1}{2} \right)^{0.5} + \frac{\epsilon_r - 1}{\epsilon_r + 1} (0.23 + 0.11 / \epsilon_r)$$

$$B = \frac{377\pi}{2Z_{0t}\sqrt{\epsilon_r}} \quad (8)$$

IV. RESULTS AND DISCUSSION

The results shown here are simulated on HFSS software. In HFSS, rectangular patch and partial ground plane are made up of PEC (Perfect Electrical Conductor) and air or vacuum can be used for the radiation box.

Firstly, the effect of varying length of partial ground plane on bandwidth of antenna is analyzed. Return loss gives us amount of power being reflected by the input port. For UWB antenna, return loss below -10 dB is considered to be quite efficient. Figure 2 shows return loss v/s frequency curve at different length of ground plane.

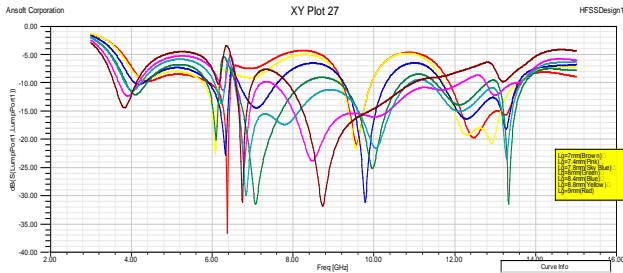


Figure 2: Return loss v/s frequency curve for varying length of ground plane

Table 2: Bandwidth at Different Length of Ground Plane

Length of Ground Plane	Frequency Range	Bandwidth h	Fractional Bandwidth h
7mm	7.8-11.01 GHz	3.21 GHz	44.58%
7.4mm	6.5-12.22GHz	5.72GHz	79.44%
7.8mm	6.5-13.6GHz	7.1GHz	98.6%
8mm	6.5-13.7GHz	7.2GHz	100%
8.4mm	9.2-10.33GHz	1.13GHz	15.69%
8.8mm	9.17-9.94GHz	0.77GHz	10.69%
9mm	9.22-9.92GHz	0.7GHz	9.72%

From the figure 2 and table 2 it is clear that optimum bandwidth is achieved when length of ground plane is 8mm.

Now, we see the effect of U-slot width on bandwidth of antenna. Figure 3 shows return loss v/s frequency curve at different width of ground plane.

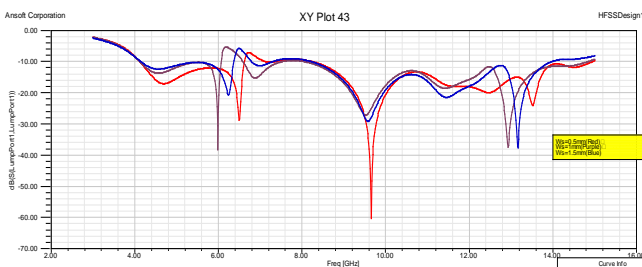


Figure 3: Return loss v/s frequency curve for varying width of U-slot

The E-plane is defined as the plane containing the electric field vector and the directions of maximum radiation while the H-plane is the plane containing the magnetic field vector and the direction of maximum radiation. The x-z plane elevation plane with some particular azimuth angle ϕ is the principle E-plane. While for the x-y plane azimuth plane with some particular elevation angle θ is principle H-plane. Figure 4 and figure 5 shows 2D E-plane radiation

pattern at different frequencies with in the band 4.1-14.1 GHz.

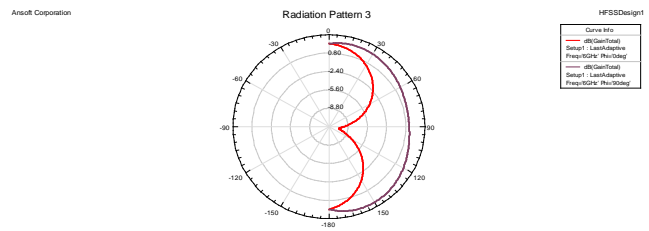


Figure 4: 2D E-plane Radiation Pattern at 6 GHz

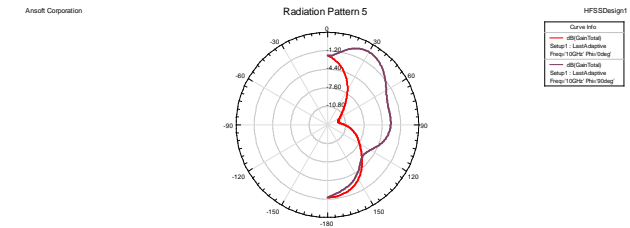


Figure 5: 2D E-plane Radiation Pattern at 10 GHz

Figure 6 and figure 7 shows 2D H-plane radiation pattern at different frequencies with in the band 4.1-14.6 GHz.

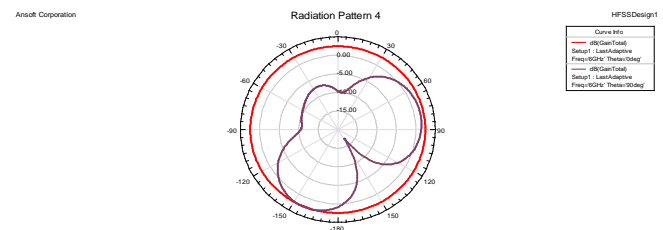


Figure 6: 2D H-plane Radiation Pattern at 6 GHz

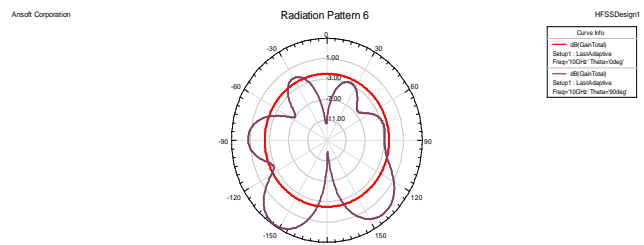


Figure 7: 2D H-plane Radiation Pattern at 10 GHz

Figure 8 and figure 9 shows 3D radiation pattern at different frequencies within the band 4.1-14.6 GHz



Figure 8: 3D Radiation Pattern at 6 GHz



Figure 9: 3D Radiation Pattern at 12 GHz

V. CONCLUSION

It is observed that double U-slot loaded rectangle patch microstrip antenna provided optimum bandwidth when length of partial ground plane is 8mm (6.5-13.7 GHz i.e. 7.2 GHz), U-slot width is 1mm (6.5-14.8 GHz i.e. 8.3GHz), and feeding position is 2.5mm from symmetrical position (6.5-14.8 GHz i.e. 8.3 GHz). Finally, we saw the effect of dielectric material on bandwidth and got optimum bandwidth by using FR-4 epoxy substrate (6.5-14.8GHz i.e. 8.3 GHz), and when length of U-slot is 12mm (6.5-14.8 GHz i.e. 8.3 GHz). Finally, we design antenna having ground plane length 8mm, U-slot width 1mm, feeding position 2.5 mm from symmetrical position, substrate material is FR-4 epoxy, length of U-slot is 12mm then we get bandwidth ($S_{11} < -10$ dB) 10.5 GHz (4.1-14.6 GHz). The proposed design of the antenna can be used for a variety of UWB applications including high speed data transfers, wireless connectivity between UWB-enabled devices and a variety of medical applications.

REFERENCES

- [1] Antara Ghosal, AnurimaMajumdar and Sisir Kumar Das, "A Multiband Microstrip Antenna for Communication System", IEEE 2018.
- [2] Robert Mark, Neha Rajak, Kaushik Mandal and Soma Das, "Semi Elliptical Two Port MIMO antennas for wideband Wireless Application", International Microwave and RF Conference (IMaRC), IEEE 2018.
- [3] Pranav Srinivasan ;Laxman Sethuraman ; Rahul Bhaskaran ; H. Umma Habiba, "Hexagonal Meshed Rectangular Reflectarray Antenna in Ku Band for Satellite Communication", 9th IEEE Annual Ubiquitous Computing, Electronics & Mobile Communication Conference (UEMCON), IEEE 2018.
- [4] K. Vijayachandra ; M. Satyanarayana ; B.T. Krishna, "Compact frequency Reconfigurable rectangle patch with double slot Antenna for Cognitive Radio Applications", Indian Conference on Antennas and Propagation (InCAP), IEEE 2018.
- [5] Abhinav Bhargava and Dr. Poonam Sinha, "Multi Rectangular Slotted Hexa Band Micro-strip Patch Antenna for Multiple Wireless Applications", Proceedings of the International Conference on Communication and Electronics Systems (ICES 2018), IEEE 2018.
- [6] GuipinJin ; Guangjie Zeng ; Miaolan Li, "A Differential-fed Dual-Band Directional Antenna for WLAN and WiMAX Applications", International Applied Computational Electromagnetics Society Symposium China, IEEE 2018.
- [7] SuchitraJeenawong, PatchadapornSangpet, PichetMoeikham and PrayootAkkaraekthalin, "A Compact Modified E-Shaped Monopole Antenna for USB Dongle Applications", International Symposium on Antennas and Propagation (ISAP), IEEE 2018.
- [8] H. Q. Ngo A. Ashikhmin H. Yang E. G. Larsson T. L. Marzetta "Cell-free massive MIMO versus small cells" IEEE Trans. Wireless Communication vol. 16 no. 3 pp. 1834-1850 Mar. 2017.
- [9] Huang A. Burr "Compute-and-forward in cell-free massive MIMO: Great performance with low backhaul load" Proc. IEEE Int. Conf. Communication (ICC) pp. 601-606 May 2017.
- [10] H. Al-Hraishawi, G. Amarasuriya, and R. F. Schaefer, "Secure communication in underlay cognitive massive MIMO systems with pilot contamination," in In Proc. IEEE Global Communication Conf. (Globecom), pp. 1-7, Dec. 2017.
- [11] V. D. Nguyen et al., "Enhancing PHY security of cooperative cognitive radio multicast communications," IEEE Trans. Cognitive Communication and Networking, vol. 3, no. 4, pp. 599-613, Dec. 2017.
- [12] R. Zhao, Y. Yuan, L. Fan, and Y. C. He, "Secrecy performance analysis of cognitive decode-and-forward relay networks in Nakagami-m fading channels," IEEE Trans. Communication, vol. 65, no. 2, pp. 549-563, Feb. 2017.
- [13] N. O. Parchin, M. Shen and G. F. Pedersen, "End-fire phased array 5G antenna design using leaf-shaped bow-tie elements for 28/38 GHz MIMO applications," 2016 IEEE International Conference on Ubiquitous Wireless Broadband (ICUWB), Nanjing, 2016, pp. 1-4.