

# Energy Efficient Routing Methodology in Wireless Sensor Networks using LEDA-DEEC

Rahul Tiwari<sup>1</sup>, Prof. Amit Saxena<sup>2</sup>, Dr. Manish Manoria<sup>3</sup>

<sup>1</sup>M-Tech Research Scholar, <sup>2</sup>Research Guide, HOD, Department of Computer Science Engineering

<sup>3</sup>Director, Truba Institute of Engineering & Information Technology, Bhopal

<sup>1,2</sup>Truba Institute of Engineering & Information Technology, Bhopal

**Abstract** - Energy is the most prominent factor within wireless sensor networks because all the sensors having battery operated system and the consumption of energy is inversely proportional to the life span of the sensor node. The less energy consumed by the node to transmit information larger the life span of the node. The energy preservation of the sensor node is directly affected the way information transmitted to the base station or server. The transmission of information is considered as routing methods. In this paper a more efficient energy efficient routing technique is proposed for the wireless sensor network. The energy of data aggregation in Distributed Energy Efficient Clustering (DEEC) has been kept lower to enhance the life span of the wireless sensor network (WSN). Proposed methodology having better life span as well as throughput. The life span is increased upto 3099 transmission rounds with throughput is about  $5.7 \times 10^4$ .

**Keywords** - WSN, DEEC, Energy Efficient Routing, Life span, Throughput.

## I. INTRODUCTION

Recent advancement in micro-electronics technology facilitated sensor designers to develop low price, low power and small sized sensors. Thousand of sensor are deployed in order to achieve high quality network. In the recent years WSNs has been emerged as an significant technology for monitoring physical environment. WSN consists of large numbers of sensor nodes these are small in size, inexpensive and battery powered. These WSNs can be used in various applications such as Military surveillance, environment monitoring, border protection, health care monitoring, weather monitoring. These applications require data without delay and energy consumed by them should be small. WSNs are deployed in insensitive environment. Since it is not possible to replace or charge battery of sensor nodes, So it is desirable to design communication protocols such that energy source is used effectively and the delay in the network in minimum. Sensor nodes senses the environment, gathers the data from its surrounding (computation) and communicates it to the base station (BS). Out of the three tasks communication takes

large amount of battery power of a sensor node, so the major concern is the communication task. We have to minimize the communication cost for saving battery power.

Wireless sensor networks[1] consists of a thousands of sensor nodes these are deployed randomly environment or space. In sensor network there is a BS (base station) which is located far away from the sensor field. Sensor nodes sends the sensed data to the BS. For sending the sensed data to BS directly a lot of energy is consumed. So it is desirable to develop some protocols to minimized this communication cost. Energy protection and maximization of network life span are the key challenges in design and simulation of WSNs.

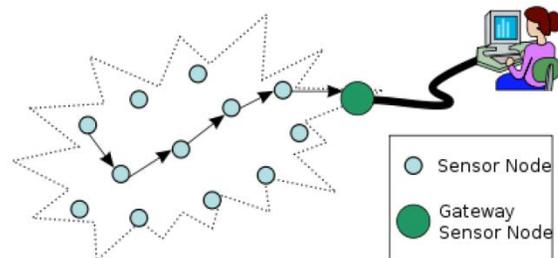


Figure 1.1: Wireless Sensor Network

### Architecture of Sensor Node:

Every sensor node mainly consists of four components. They are sensing unit, transceiver, processing unit and power source. Some sensor nodes also consist of optional components similar to location finding system, power generator and mobilizer. The sensing unit commonly consists of sensor and ADC (Analogue and digital converter). The ADC converts the analogue data to digital data so that node can process it before transmitting the data. Transceiver connects the node to the network. The processing unit consists of processor and memory. This unit is responsible for managing the task of sensor unit. Mobilizer is used to enable node movement.

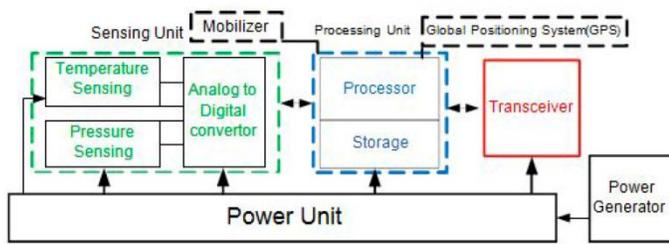


Figure 1.2: Sensor Node's Architecture

## II. VARIOUS ROUTING TECHNIQUES

Challenges encountered as a result of constrained energy supply and bandwidth in WSN when managing the network necessitates the need for development of energy awareness protocol at all levels of networking protocol stack. To present efficient power management in WSN, researches have been focused in areas such as system-level power awareness like radio communication hardware, low duty cycle work and energy-aware MAC protocol [7]. Also, it was observed that the network layer offers a better means through which reliable relaying of data and energy-efficient route setup within a network may help for maximizing the network life span.

It must be noted that routing in WSN has much distinguishable features compare to contemporary communication and ad hoc networks [7]. These features are as follows:

- WSN cannot be built with global addressing (internet protocol address) scheme due to the enormous number of sensor nodes;
- There is significant redundancy in generated data because several sensors may gather the same data within a specified field. These redundancy bits need to be removed to increase the bandwidth utilization and also reduce the energy use in the network;
- Transmission power of the system, processing capacity and storage are constraint factors are considered when managing a WSN.

### Clustered Architecture:

Hierarchical and cluster based routing methodologies are well known routing methods with a special advantage related to scalability and efficient communications. Hence, they are used for energy proficient routing in wireless sensor network. In hierarchical routing, higher-energy nodes may be used to process and send the information,

whereas low-energy nodes may be used to perform the sensing in the vicinity of the target. The creation of clusters and the assignment of special tasks to cluster heads contribute to the overall systems scalability. Nodes within a cluster lower the energy consumption by the stage data aggregation and fusion, lowering the may numbers of transmitted messages to the base station, thus prolonging network life span. Hierarchical routing is mainly comprised of two levels: one for the selection of cluster heads and the other for routing.

A clustered architecture consists of a cluster head, or Personal Area Network coordinator, which organizes sensor nodes, communicates for them to the BS and typically interfaces with another network. This structural design is well suited when data fusion is necessary. The cluster head fuses data gathered by member nodes and transmits the resulting information to the base station. A design of a clustered architecture has been given in Fig 2.1 In order for clustered networks for achieving the self-organization, the cluster formation and election process must be an distributed, autonomous procedure. This is achieved during network layer protocols, such as Low Energy Adaptive Clustering-Hierarchy (LEACH). [8,9]

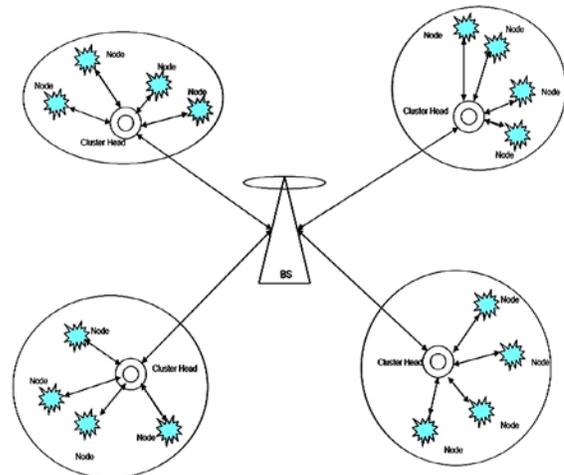


Fig. 2.1. Clustered Architecture Illustrating data aggregation

A set of protocols for complete implementation of a layered architecture is described as a Unified Network Protocol Framework (UNPF). Three operations are integrated into the protocol structure of UNPF: initialization of network and maintenance, Medium Access Control (MAC) and routing protocols. The BS broadcasts an identifying beacon on a general control channel. All nodes which receive the beacon broadcast their signal at their low power setting along with their own identification. Those nodes that the BS can directly communicate with form layer one. All nodes then transmit a beacon signal again. Nodes that receive this

beacon again broadcast their signal at their low power setting along with their own identification. Therefore, the nodes of layer one establish layer- two nodes by recording the identification of the nodes with which they can communicate. The iterations continue until all nodes are identified with a layer. Thereafter, a periodic beacon refreshes the architecture. [8]

**LEACH:**

LEACH operates in two phases, setup and steady state. During the setup phase, LEACH minimize the energy dissipation by randomly selecting and periodically reselecting nodes as cluster heads. In this way, the high energy consumption experienced by cluster heads is distributed all through the network, so assuring that all cluster heads eventually expend equal energy. Later than selection, the cluster heads advertises their selection to all network nodes. The nodes are in turn associate themselves with the nearest cluster head based on the received signal strength of the selection advertisement. A TDMA schedule is then assigned for node communication. The steady-state phase is extensive long in comparison to the setup phase for minimizing the overhead of cluster formation. Data transmission takes place during the steady-state phase based on the TDMA schedule established during setup. Energy is conserved by local processing and data aggregation at the cluster head. [9]

**Ad hoc On-demand Distance Vector:**

Ad hoc On-demand Distance Vector (AODV), as the name suggests is an on-demand protocol design for mobile ad hoc networks [6]. This protocol responds quickly to changing link conditions and link breakages. The nodes mark the routes as invalid whenever there is a link breakage. AODV does not necessitate a node to maintain routes to destinations that are not in active communication. Loop freedom in AODV is ensured by using destination sequence numbers. These also allow nodes to use the most recent route to a target. The routing table information consist the destination address and the next hop address with the number of hops required to reach the destination. Also, the most recent destination sequence number associated with destination and life span of the route is stored in the table. If throughout the life span, the route is not used, the routing table entry is discarded.

**DEEC (Distributed Energy Efficient Clustering):**

In DEEC [3] protocol all nodes use the initial and residual energy level to define the cluster heads. DEEC estimate the ideal value of network life span to compute the reference

energy that each node should expend during each round. In a two-level heterogeneous network, where we have two categories of nodes, m.N advanced nodes

with initial energy equal to  $E_o.(1 + a)$  and  $(1 - m).N$  normal nodes, where the initial energy is equal to  $E_o$ . Where a and m are two variable which control the nodes percentage types (advanced or normal) and the total initial energy in the network  $E_{total}$ .

The value of Total Energy is given as

$$E_{total} = N.(1 - m).E_o + N.m.E_o.(1 + a) \quad (1)$$

•The average energy of  $r^{th}$  round is set as follows

$$E(r) = \frac{1}{N} E_{total} (1 - R) \quad (2)$$

R represent the total rounds of the network life span and is defined as

$$R = \frac{E_{total}}{E_{Round}} \quad (3)$$

•  $E_{Round}$  is the total energy dissipated in the network during a round, is equal to:  $E_{Round} = L(2NE_{elec} + NEDA + kEmpd^4_{toBS} + NE_{fsd2toCH})$  (4)

k: number of clusters

EDA: data aggregation cost expended in the cluster heads

dtoBS : average distance between the cluster head and the base station

dtoCH: average distance between the cluster members and the cluster head.

• Because it has been assumed that the nodes are uniformly distributed then get:

$$dtoCH = \frac{M}{\sqrt{2k\pi}}$$

$$dtoBS = \frac{0.765 M}{2}$$

**III. PROPOSED METHODOLOGY**

The wireless sensor network a subset of mobile ad-hoc network has lot of challenges to reduce the energy consumption of sensor nodes or wireless nodes to live longer in network and keep communicating with the network. Here we have to work out main areas by which a

node can live longer and i.e. either make batteries (source of energy) equipped with nodes having larger in size or the material having larger charges saving capability but this approach having limited capabilities because the larger battery size make sensor node more bulk which is not feasible in any case, and to finding out the material has larger charge storing capability is also tough task to do.

Instead doing above things another method is to make transfer of information on network more efficient. For this many routing protocols has been given as we discussed in the previous sections.

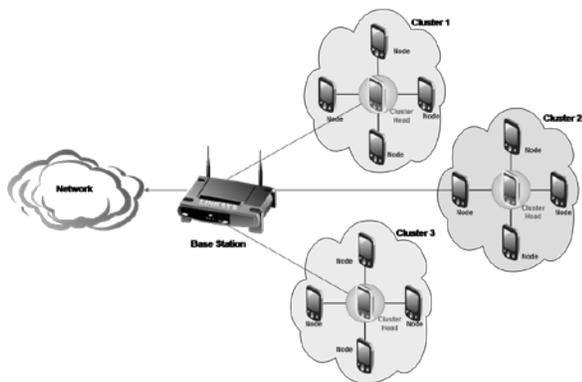


Fig. 3.1 Network Diagram of Proposed Methodology with LEDA-DEEC

Here we are making changes in one of the routing protocol i.e. distributed energy efficient routing (DEEC), where changes are being made in the information aggregation energy. The proposed approach is to have the lower data aggregation energy and the energy can be conserve for such frequent changes in the network. The proposed diagram of network is presented in Fig. 3.1.

The above mentioned proposed routing strategy is implemented and its step by step execution is shown in below steps which are as follows:

- a) Start the program.
- b) Initialization environmental variables (with low data aggregation energy)
- c) Generation of wireless sensor network model
- d) Set loop for the number of rounds
- e) Set number of alive nodes at the beginning of network
- f) Check number of dead nodes
- g) Select the cluster heads.

- h) Calculate energy consumptions to transfer data between cluster head (CH) to Base station(BS) and nodes(N) to cluster head(CH)
- i) Check alive nodes after data transfer
- j) If alive nodes are > 0 then Go back to Next Round (step c)
- k) If alive nodes are = 0 then calculate Throughput of the network
- l) Compare and display results
- m) End of program

Table I: Network Simulation Parameters

Operation	Energy Dissipated
Transmitter / Receiver Electronics	$E_{elec} = E_{tx} = E_{rx} = 50nJ/bit$
Data aggregation energy	$EDA = 1/5/10-nJ/bit/signal$
Transmit amplifier (if $d$ to BS < $d_0$ )	$E_{fs} = 10pJ/bit/4m^2$
Transmit amplifier (if $d$ to BS > $d_0$ )	$E_{mp} = 0.0013pJ/bit/m^4$

#### IV. SIMULATION RESULTS

Wireless Sensor Network(WSN) is having lots of research areas to work on and here we have chosen routing protocol to make network life span more than the previous work. The simulation performed on distributed energy efficient clustering (DEEC) which is based on reducing the data aggregation energy.

The simulated results are in terms of number of alive nodes and numbers of dead nodes versus number of transmission rounds and throughput curve.

In the previous work life span of the network with low energy adaptive clustering hierarchy(LEACH) is calculated up to 2490 transmission rounds.

If the network sustain for more number of rounds means life span of the network is going better. In proposed approach the life span of the network enlarged up to 3099 rounds in 100x100 network, 2826 rounds in 134x134 network, 2521 rounds in 150x150 network and 2867 rounds in 200x200 network which is greater than the previous work. Table II shows comparison of the network life span with existing work.

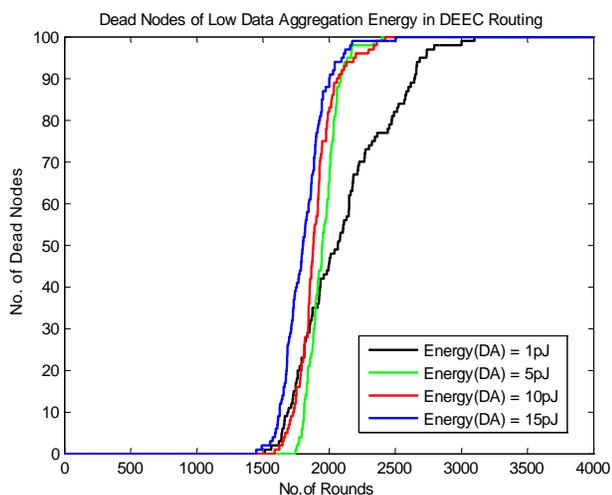


Fig. 4.1 Network life span in terms of dead nodes versus no. of rounds

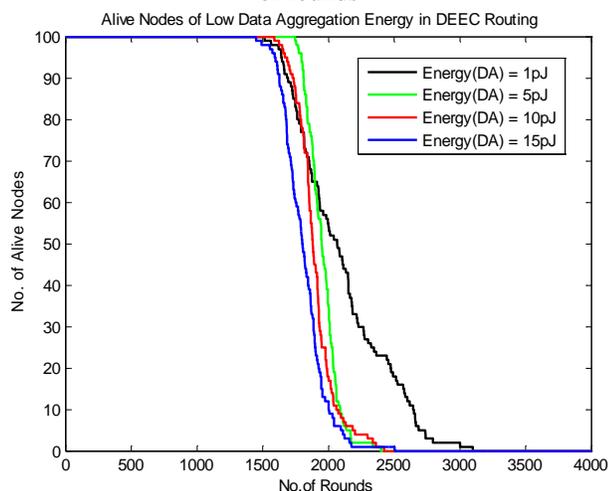


Fig. 4.2 Network life span in terms of alive nodes versus no. of rounds

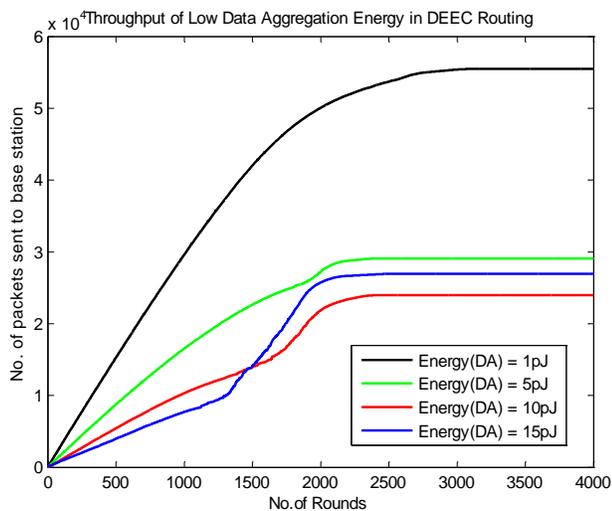


Fig. 4.3 Throughput versus no. of rounds

The alive nodes versus no. of transmission rounds graph is shown in the Fig. 4.1 and dead node versus no. of transmission rounds graph is shown in Fig. 4.2 the

Throughput is also shown in the Fig. 4.3. The results are given for 100x100 network size and the network life span is also shown for other network sizes in Table-II.

Table II: Comparison of Proposed and Existing Work

Routing Technique	Network Size	Number of Nodes	First Node Death Round	Last Node Death Round
Proposed Approach (LEDA-DEEC)	100mX100m	100	1519	3099
	134mX134m	134	1475	2826
	150mX150m	150	1359	2521
	200mX200m	200	1533	2867
Previous Work	100mX100m	100	1496	2490
	134mX134m	134	1460	2459
	150mX150m	150	1424	2388
	200mX200m	200	1204	2270

## V. CONCLUSION AND FUTURE SCOPE

The wireless sensor network(WSN) is need to be sustain longer to stay with the network, and from the proposed method and its simulation results analyzed that with the lower data aggregation energy of information in the distributed energy efficient clustering (DEEC) routing will have longer network life span which is higher than the existing methodologies. During simulation of proposed methodology number of dead nodes vs transmission rounds are calculated and the same for alive nodes and throughput i.e. packets send to base station also calculated for different data aggregation energy and found longer network life span(the sensor nodes survived to more number of transmission rounds) with better throughput. With the analysis of other network like network area, initial energy etc. researcher will make out something more robust routing protocols which has lower energy consumption and higher network life span.

## REFERENCES

- [1] Akyildiz, W. Su, Y. Sankarasubramaniam, E. Cayirci, survey on sensor networks, IEEE Communications Magazine, 40:8, 102-114, 2002.
- [2] Tyagi S, Kumar N. A systematic review on clustering and routing techniques based upon LEACH protocol for wireless sensor networks, Journal of Network and Computer Applications, Elsevier, Vol. 36, issue 2, 2013, pp 623-645.
- [3] S.Mohanty and S.K.Patra, —A novel Bio-inspired Clustering algorithm for Wireless Sensor Networks, accepted in 3rd International Conference on Intelligent and Advanced Systems, Kuala Lumpur, Malaysia (ICIAS 2010).
- [4] D. J. Cook and S.K. Das, Smart Environments: Technologies, Protocols, and Applications, John Wiley, New York, 2004.

- [5] A. Manjeshwar and D. P. Agrawal, TEEN: a protocol for enhanced efficiency in wireless sensor networks, Proceedings of the 1<sup>st</sup> International Workshop on Parallel and Distributed Computing Issues in Wireless Networks and Mobile Computing, San Francisco, USA, April 2001.
- [6] W. R. Heinzelman, A. Chandrakasan, and H. Balakrishnan, Energyefficient communication protocol for wireless microsensor networks, Proceedings of the IEEE Hawaii International Conference on System Sciences, pp. 1–10, Maui, HI, USA, January 2000.
- [7] W. Heinzelman, A. Chandrakasan, H. Balakrishnan, An application specific protocol architecture for wireless microsensor networks, IEEE Trans. Wireless communication, vol.1, no.4, pp 660-670, Oct. 2002.
- [8] S. Lindsey and C. S. Raghavendra, PEGASIS: power efficient gathering in sensor information systems, Proceedings of the IEEE Aerospace Conference, Big Sky, MT, USA, pp 1125-1130, March 2002.
- [9] Bista, R., Yong-ki Kim, Jae-Woo Chang, A New Approach for Energy-Balanced Data Aggregation in Wireless Sensor Networks, *Computer and Information Technology, 2009. CIT '09. Ninth IEEE International Conference on*, vol.2, no., pp.9,15, 11-14 Oct. 2009.
- [10] Lindsey, S. Raghavendra, C. and Sivalingam, K, M. Data gathering in Sensor Networks using the energy delay metric, IEEE transactions on parallel and distributed systems, Vol. 13, No. 9, pp 924-935, 2002.
- [11] A. Manjeshwar and D. P. Agrawal, APTEEN: a hybrid protocol for efficient routing and comprehensive information retrieval in wireless sensor networks, Proceedings of the 2nd International Workshop on Parallel and Distributed Computing Issues in Wireless Networks and Mobile Computing, Ft. Lauderdale, FL, USA, April 2002.
- [12] Yanwei Wu, Xiang-yang Li, Mo Li, Wei Lou, Energy-Efficient Wake-Up Scheduling for Data Collection and Aggregation, *Parallel and Distributed Systems, IEEE Transactions on*, vol.21, no.2, pp.275,287, Feb. 2010.
- [13] Chand, K.K., Bharati, P.V., Ramanjaneyulu, B.S., Optimized Energy Efficient Routing Protocol for life-time improvement in Wireless Sensor Networks, *Advances in Engineering, Science and Management (ICAESM), 2012 International Conference on*, vol., no., pp.345,349, 30-31 March 2012.
- [14] Arabi, Z., HERF: A hybrid energy efficient routing using a fuzzy method in Wireless Sensor Networks, *Intelligent and Advanced Systems (ICIAS), 2010 International Conference on*, vol., no., pp.1,6, 15-17 June 2010.
- [15] Katiyar, V., Chand, N., Gautam, G.C., Kumar, A., Improvement in LEACH protocol for large-scale wireless sensor networks, *Emerging Trends in Electrical and Computer Technology (ICETECT), 2011 International Conference on*, vol., no., pp.1070,1075, 23-24 March 2011.