

Development of Efficient 4G Mobile Wireless System using Hermitian Encoding and PSK Modulation

Mohd. Musheer Khan¹, Prof. H. Mirza²

¹Research Scholar, ²Research Guide

Department of Electronics and Communication, Oriental Institute of Science and Technology, Bhopal

Abstract - The wireless communication system is becoming advanced and advanced day by day and the applications of it is now presents in all area of the world covering technical, non-technical, commerce and financial sectors. It is in the hand of almost all human being to share ideas and day to day activities are concerned with it. The performance enhancement of it is the most prominent criteria among researchers over decades, in the same context we have been working toward the performance enhancement of 4G mobile communication. For the improvements in the existing system we have proposed the system in which the OFDM architecture is facilitate with the multiple input multiple output (MIMO) technology with 2 transmitter and 2 receiver antennas. To reduce the error rate due to interferences and fading effect, Hermitian encoding is utilized. The proposed system has achieved the bit error rate about 4×10^{-8} for the 1024 number of symbols which is better than the existing system.

Keywords - 4G, Mobile Communication, Hermitian Encoding, BER, PSK Modulation, MIMO, OFDM.

I. INTRODUCTION

The term 4G is used broadly to include several types of broadband wireless access communication systems, not only cellular telephone systems. One of the terms used to describe 4G is MAGIC—Mobile multimedia, anytime anywhere, Global mobility support, integrated wireless solution, and customized personal service. As a promise for the future, 4G systems, that is, cellular broadband wireless access systems, have been attracting much interest in the mobile communication arena. The 4G systems not only will support the next generation of mobile service, but also will support the fixed wireless networks. This paper presents an overall vision of the 4G features, framework, and integration of mobile communication. The features of 4G systems might be summarized with one word Integration. The 4G systems are about seamlessly integrating terminals, networks, and applications to satisfy increasing user demands. The continuous expansion of mobile communication and wireless networks shows evidence of exceptional growth in the areas of mobile subscriber, wireless network access, mobile services, and applications. An estimate of 1 billion users by

the end of 2003 justifies the study and research for 4G systems. Numerous incompatible analog systems were placed in service around the world during the 1980s.

The 2G (second generation) systems designed in the 1980s were still used mainly for voice applications but were based on digital technology, including digital signal processing techniques. These 2G systems provided circuit-switched data communication services at a low speed. The competitive rush to design and implement digital systems led again to a variety of different and incompatible standards such as GSM (global system mobile), mainly in Europe; TDMA (time division multiple access) (IS-54/IS-136) in the U.S.; PDC (personal digital cellular) in Japan; and CDMA (code division multiple access) (IS-95), another U.S. system. These systems operate nationwide or internationally and are today's mainstream systems, although the data rate for users in these system is very limited. During the 1990s, two organizations worked to define the next, or 3G, mobile system, which would eliminate previous incompatibilities and become a truly global system.

The 3G system would have higher quality voice channels, as well as broadband data capabilities, up to 2 Mbps. Unfortunately, the two groups could not reconcile their differences, and this decade will see the introduction of two mobile standards for 3G. In addition, China is on the verge of implementing a third 3G system. An interim step is being taken between 2G and 3G, the 2.5G. It is basically an enhancement of the two major 2G technologies to provide increased capacity on the 2G RF (radio frequency) channels and to introduce higher throughput for data service, up to 384 kbps. A very important aspect of 2.5G is that the data channels are optimized for packet data, which introduces access to the Internet from mobile devices, whether telephone, PDA (personal digital assistant), or laptop. However, the demand for higher access speed multimedia communication in today's society, which greatly depends on computer communication in digital format, seems unlimited. According to the historical indication of a generation

revolution occurring once a decade, the present appears to be the right time to begin the research on a 4G mobile communication system. mobile technologies through advanced technologies. Application adaptability and being highly dynamic are the main features of 4G services of interest to users.

These features mean services can be delivered and be available to the personal preference of different users and support the users' traffic, air interfaces, radio environment, and quality of service. Connection with the network applications can be transferred into various forms and levels correctly and efficiently. The dominant methods of access to this pool of information will be the mobile telephone, PDA, and laptop to seamlessly access the voice communication, high-speed information services, and entertainment broadcast services.

4G Mobile Communications

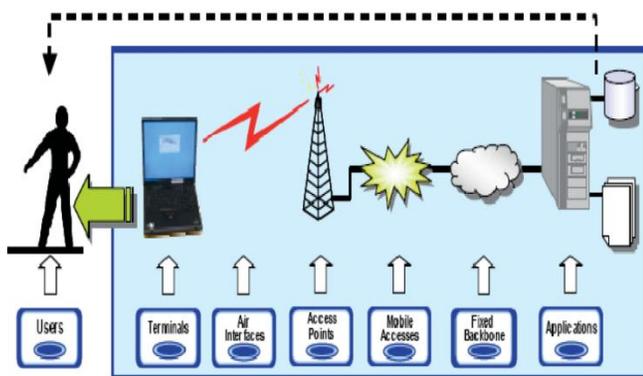


Fig. 1. 4G Mobile Communication

Figure 1 illustrates elements and techniques to support the adaptability of the 4G domain. The fourth generation will encompass all systems from various networks, public to private; operator-driven broadband networks to personal areas; and ad hoc networks. The 4G systems will interoperate with 2G and 3G systems, as well as with digital (broadband) broadcasting systems. In addition, 4G systems will be fully IP-based wireless Internet. This all encompassing integrated perspective shows the broad range of systems that the fourth generation intends to integrate, from satellite broadband to high altitude platform to cellular 3G and 3G systems to WLL (wireless local loop) and FWA (fixed wireless access) to WLAN (wireless local area network) and PAN (personal area network), all with IP as the integrating mechanism. With 4G, a range of new services and models will be available. These services and models need to be further examined for their interface with the design of 4G systems.

II. SYSTEM MODEL

OFDM is robust in adverse channel conditions and allows a high level of spectral efficiency. Multiple access techniques which are quite developed for the single carrier modulations (e.g. TDMA, FDMA) had made possible of sharing one communication medium by multiple number of users simultaneously. The sharing is required to achieve high capacity by simultaneously allocating the available bandwidth to multiple users without severe degradation in the performance of the system. FDMA and TDMA are the well known multiplexing techniques used in wireless communication systems. Orthogonal Frequency Division Multiplexing (OFDM) is a special form of multi carrier modulation technique which is used to generate waveforms that are mutually orthogonal. In an OFDM scheme, a large number of orthogonal, overlapping, narrow band sub-carriers are transmitted in parallel. These carriers divide the available transmission bandwidth. The separation of the sub-carriers is such that there is a very compact spectral utilization. With OFDM, it is possible to have overlapping sub channels in the frequency domain, thus increasing the transmission rate. In order to avoid a large number of modulators and filters at the transmitter and complementary filters and demodulators at the receiver, it is desirable to be able to use modern digital signal processing techniques, such as fast Fourier transform (FFT).

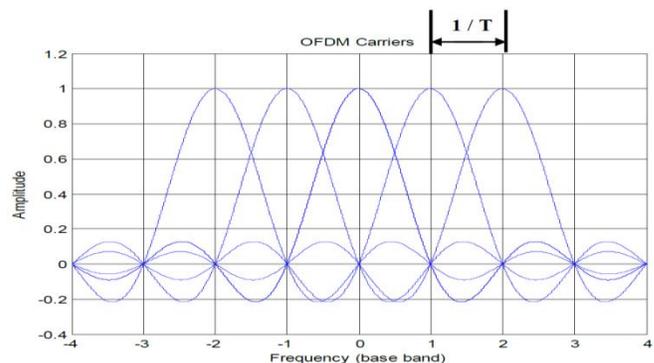


Fig. 2.1 Frequency spectrum of OFDM

After more than forty years of research and development carried out in different places, OFDM is now being widely implemented in high-speed digital communications. OFDM has been accepted as standard in several wire line and wireless applications. Due to the recent advancements in digital signal processing (DSP) and very large-scale integrated circuits (VLSI) technologies, the initial obstacles of OFDM implementations do not exist anymore. In a basic communication system, the data are modulated onto a single carrier frequency. The available bandwidth is then totally

occupied by each symbol. This kind of system can lead to inter-symbol-interference (ISI) in case of frequency selective channel. The basic idea of OFDM is to divide the available spectrum into several orthogonal sub channels so that each narrowband sub channels experiences almost flat fading. Many research centers in the world have specialized teams working in the optimization of OFDM systems. The attraction of OFDM is mainly because of its way of handling the multipath interference at the receiver.

Multipath phenomenon generates two effects (a) Frequency selective fading and (b) Intersymbol interference (ISI). The "flatness" perceived by a narrowband channel overcomes the frequency selective fading. On the other hand, modulating symbols at a very low rate makes the symbols much longer than channel impulse response and hence reduces the ISI. Use of suitable error correcting codes provides more robustness against frequency selective fading. The insertion of an extra guard interval between consecutive OFDM symbols can reduce the effects of ISI even more. The use of FFT technique to implement modulation and demodulation functions makes it computationally more efficient. OFDM systems have gained an increased interest during the last years. It is used in the European digital broadcast radio system, as well as in wired environment such as asymmetric digital subscriber lines (ADSL). This technique is used in digital subscriber lines (DSL) to provides high bit rate over a twisted-pair of wires.

The major advantages of OFDM are its ability to convert a frequency selective fading channel into several nearly flat fading channels and high spectral efficiency. However, one of the main disadvantages of OFDM is its sensitivity against carrier frequency offset which causes attenuation and rotation of subcarriers, and intercarrier interference (ICI) [1,2]. The undesired ICI degrades the performance of the system.

III. PROPOSED METHODOLOGY

In this proposed model we are using Hermitian encoding with 2-PSK and 4-PSK modulation at the place of IDFT and DFT. AWGN channel is used for transmission with cyclic prefixing. Here first of all Hermitian encoding is done followed by modulation then data. After OFDM modulation it comes the filtering of the data, which provides the orthogonality to the subcarriers. IFFT will convert time domain signal to the frequency domain. After passing through the channel on the signal FFT will be performed with Hermitian Encoding and Decoding Process. Demodulated data is converted to binary form and decoded to obtain the original data transmitted.

The Block Diagram in the transmitter section very firstly the data is modulated by 2-PSK/4-PSK modulator followed by Hermitian encoding process and then Inverse Fast Fourier Transform (IFFT) is applied for multiplexing then after addition of cyclic prefix is done with data signal through the channel the noise is mixed in the receiver section then cyclic prefix is removed Fast Fourier Transform (FFT) is applied for de-multiplexing followed by Hermitian decoding then 2-PSK/4-PSK Demodulation has been then after moving average filtering have been adopted to reduce the BER.

As the above flow graph shows the whole simulation flow of Proposed Methodology in this firstly, the environmental variables initialized the then data is generated, 2-PSK/4-PSK Modulates followed by Hermitian encoding then IFFT Technique is used after that addition of cyclic prefix done then noise mixed with data signal. Then Cyclic Prefix is removed FFT is adopted and 2-PSK/4-PSK demodulator is implemented with moving average filter for minimizing the BER.

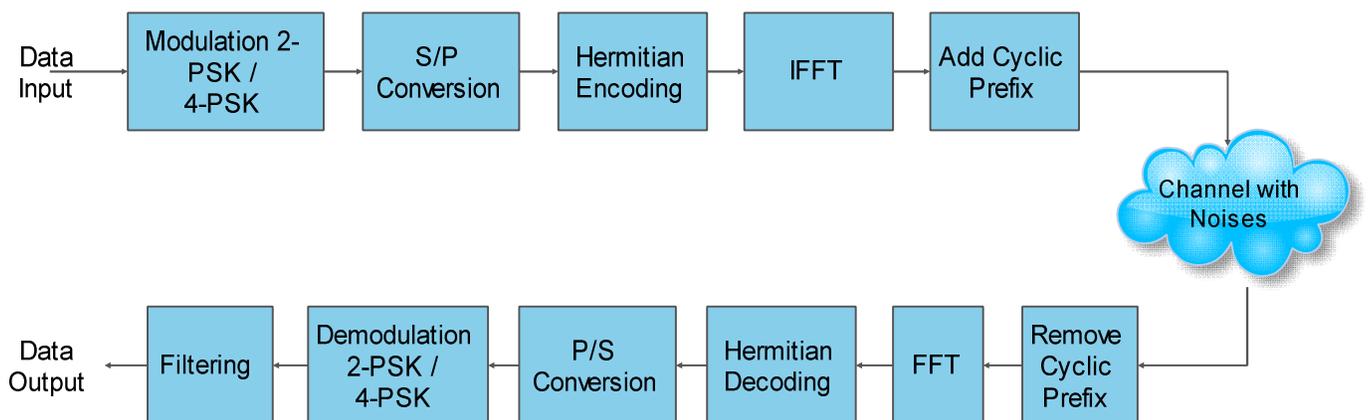


Fig. 3.1 Block Diagram of the Proposed Methodology

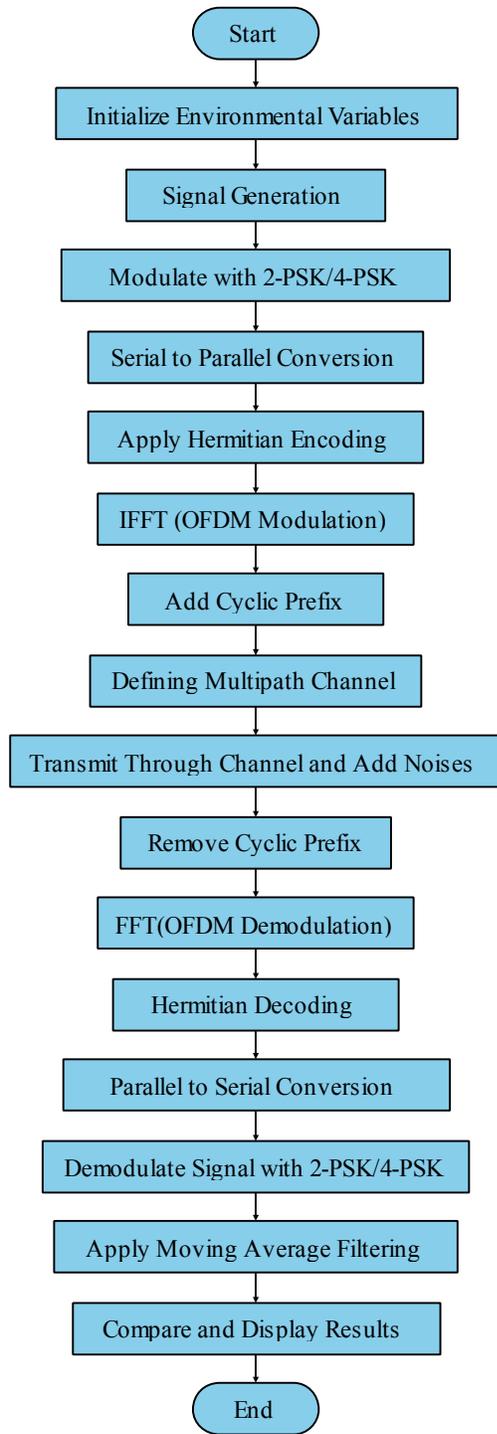


Fig. 3.2 Flow Chart of the Proposed Methodology

IV. SIMULATION RESULTS

The proposed system is explained in the previous section. In this section the results of simulations performed on the proposed system is discussed. The system is evaluated under different data lengths and with 2-PSK/4-PSK modulation. The results are compared for different symbol sizes with

moving average filter. The simulation outcomes are shown in below figures.

In Fig. 4.1 the simulation results with 256 symbols is displayed, and the performance of the proposed with 2-PSK/4-PSK modulation and Hermitian encoding. So here Filtered encoding proposed technique for efficient 4G system.

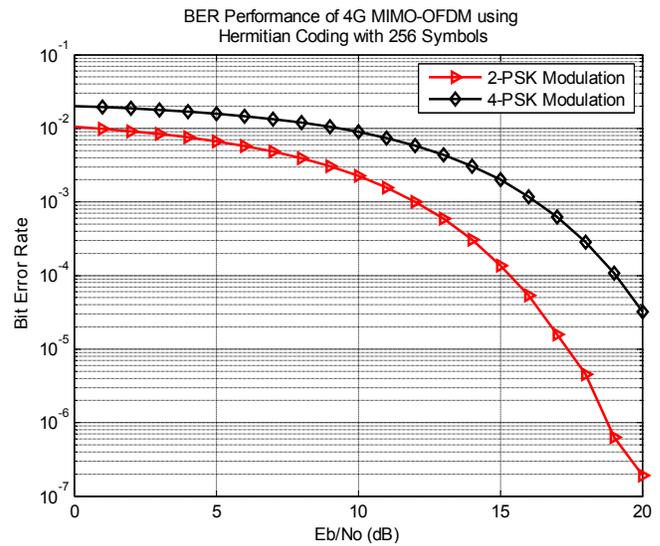


Fig. 4.1 BER Performance Curve for 4G MIMO System using Hermitian Encoding with 256 number of Symbols

In Fig. 4.2 the simulation results with 512 symbols is displayed, and the performance of the proposed with 2-PSK/4-PSK modulation and Hermitian encoding. So here Filtered encoding proposed technique for efficient 4G system.

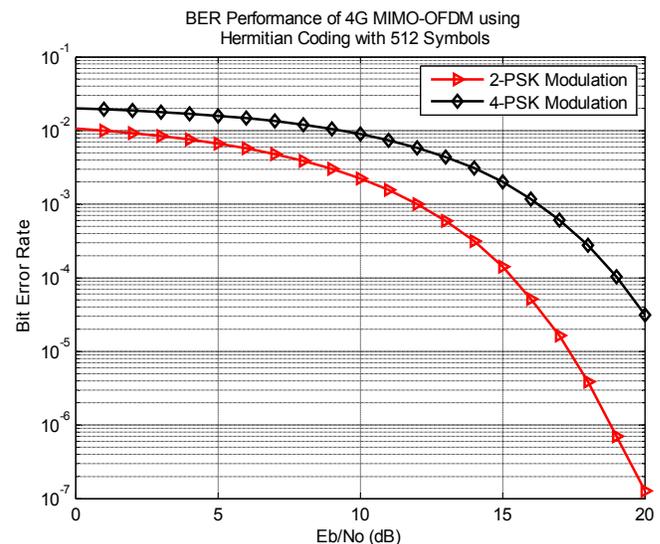


Fig. 4.2 BER Performance Curve for 4G MIMO System using Hermitian Encoding with 512 number of Symbols

In Fig. 4.3 the simulation results with 1024 symbols is displayed, and the performance of the proposed with 2-PSK/4-PSK modulation and Hermitian encoding. So here Filtered encoding proposed technique for efficient 4G system.

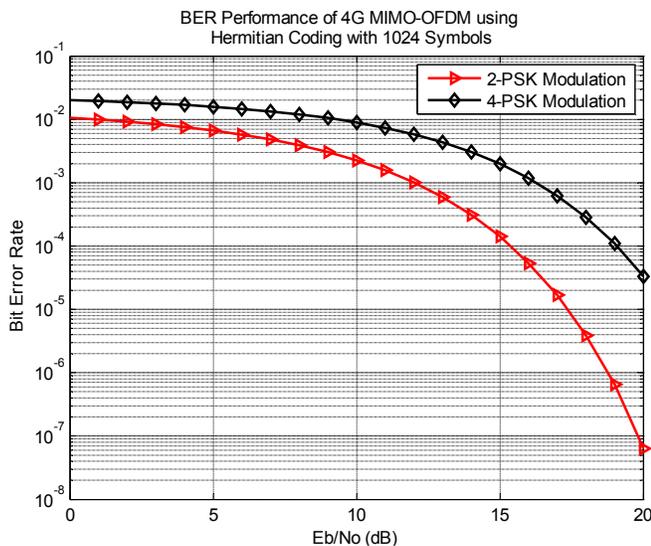


Fig. 4.3 BER Performance Curve for 4G MIMO System using Hermitian Encoding with 1024 number of Symbols

Table I: Bit Error Rate Performance Comparison

SNR	Existing System	Proposed System
0	1×10^{-1}	1×10^{-2}
4	2×10^{-2}	7.5×10^{-3}
8	8×10^{-4}	3×10^{-3}
12	1.5×10^{-7}	9×10^{-4}
14	-	3×10^{-4}
16	-	5×10^{-5}
18	-	4×10^{-6}
20	-	6.5×10^{-8}

The optimum bit error rate (BER) for the existing system is 1.5×10^{-7} and for the proposed methodology is 6.5×10^{-8} which is quite better in terms to maintain better quality of services and performance of the system than the existing structure.

V. CONCLUSION AND FUTURE SCOPE

The proposed 4G wireless system is simulated and the outcomes are find out in terms of BER. The BER achieved is 6×10^{-8} better than the existing work. The values of BER is varying with the changes in modulation techniques as well as symbols and can be say that the with 1024 symbols and 2-

PSK modulation scheme the wireless Hermitian Encoding based MIMO-OFDM system outperform, the error rate is better than the previous techniques. As the symbol size increases the system also start performing better and better but more than 1024 symbols the performance start decreasing. Now there are several scopes for improvements in the 4G mobile wireless communication system work towards making this system better and better with the utilization of the detection methodologies at the receiver side. The detection methods are better shield against the interferences and noises introduced during transmission.

REFERENCES

- [1] O. Popescu and D. C. Popescu, "On the performance of 4G mobile wireless systems with multiple antennas," *Communications (COMM), 2014 10th International Conference on*, Bucharest, 2014, pp. 1-4.
- [2] Sricharan, M.S., "Tutorial: Towards 4G wireless systems (WiMAX & LTE) BR" (4GWS)," in *Recent Trends in Information Technology (ICRITIT), 2011 International Conference on*, vol., no., pp.1-1, 3-5 June 2011
- [3] Mahajan, S.; Jagannatham, A.K., "Hierarchical DWT based optimal diversity power allocation for video transmission in 4G OFDMA wireless systems," in *Imaging Systems and Techniques (IST), 2011 IEEE International Conference on*, vol., no., pp.279-283, 17-18 May 2011
- [4] Youngtaek Hong; Juneseok Lee; Jaehoon Choi, "Design of a multi-band antenna for 4G wireless systems," in *Antennas and Propagation (EuCAP), 2014 8th European Conference on*, vol., no., pp.597-600, 6-11 April 2014
- [5] Fixed, nomadic, portable and mobile applications for 802.16-2004 and 802.16e WiMAX networks, November 2005 (Prepared by Senza Fili, consulting on behalf of the WiMAX Forum).
- [6] J. G. Andrews, A. Ghosh, R. Muhamed, *Fundamentals of WiMAX Understanding Broadband Wireless Networking*, Prentice Hall, 2007.
- [7] H. Ghazaleh and M. Muhanna, "Enhancement of throughput time using MS-TCP transport layer protocol for 4G mobiles," *Systems, Signals and Devices, 2008. IEEE SSD 2008. 5th International Multi-Conference on*, Amman, 2008, pp. 1-5.
- [8] J. Govil and J. Govil, "4G: Functionalities Development and an Analysis of Mobile Wireless Grid," *Emerging Trends in Engineering and Technology, 2008. ICETET '08. First International Conference on*, Nagpur, Maharashtra, 2008, pp. 270-275.

- [9] Jayanthiladevi, H. M. Premlatha and G. M. K. Nawaz, "Analysis study of seamless integration and intelligent solution in any situation by the future advanced mobile universal systems 4G - (FAMOUS 4G)," Emerging Trends in VLSI, Embedded System, Nano Electronics and Telecommunication System (ICEVENT), 2013 International Conference on, Tiruvannamalai, 2013, pp. 1-5.
- [10] Janny Hu and W. W. Lu, "Open wireless architecture - the core to 4G mobile communications," Communication Technology Proceedings, 2003. ICCT 2003. International Conference on, 2003, pp. 1337-1342 vol.2.
- [11] D. Kim, S. Lee, H. Lee and H. Yoon, "An Effective Hotspot Cell Management Scheme Using Adaptive Handover Time in 4G Mobile Networks," TENCON 2005 2005 IEEE Region 10, Melbourne, Qld., 2005, pp. 1-6.
- [12] Yu Zheng, D. He, Xiaohu Tang and Hongxia Wang, "AKA and Authorization Scheme for 4G Mobile Networks Based on Trusted Mobile Platform," Information, Communications and Signal Processing, 2005 Fifth International Conference on, Bangkok, 2005, pp. 976-980.