

A Review: Load Frequency Control of Single Area Power System by using Integral Control Action

Tanu Gautam and Ashish Bhargava

MTech Scholar

Abstract - In an interconnected power system, if a load demand changes randomly, both frequency and tie line power varies. The main aim of load frequency control is to minimize the transient variations in these variables and also to make sure that their steady state errors is zero. Many modern control techniques are used to implement a reliable controller. The objective of these control techniques is to produce and deliver power reliably by maintaining both voltage and frequency within permissible range. When real power changes, system frequency gets affected while reactive power is dependent on variation in voltage value. That's why real and reactive power are controlled separately. Control of load frequency controls the active power. The role of automatic generation control (AGC) in power system operations with reference to tie line power under normal operating conditions is analysed. This dissertation proposed load frequency control of single area power system by integral control action.

I. INTRODUCTION

The possibilities of enhancement of complex interconnected power system is to decrease the probability of black outs and enable an increasing power exchange among different system inside the large interconnect networks. For large-scale power systems, which normally consist of interconnected control area, Load Frequency Control (LFC) is important to keep the system frequency and the inter-area tie power as close as possible the scheduled values. The mechanical input power to the generators is used to control the frequency of output electrical power and to maintain the power exchange between the areas as scheduled. A well designed and operated power system should cope with changes in the load and with system disturbances, and it should provide acceptable high level of power quality while maintaining both voltage and frequency within tolerable limits [1].

The power system frequency control, as a major function of automatic generation control (AGC), has been one of the important control problems in electric power system design and operation. Undesired frequency deviations have direct impact on power system operation and system reliability [2]. A large frequency deviation can damage equipment, degrade load performance, cause the transmission lines to be overloaded and can interfere with system protection schemes, ultimately leading to an unstable condition for the power system [3]. The increasing number of major power grid blackouts that have been experienced in recent years [UCT 04, AND 05, MAK 05, SAN 07, SAR 12] for example, the Brazil blackout of March 1999, Iran blackout of Spring 2001 and

Spring 2002, Northeast USA-Canada blackout of August 2003, Southern Sweden and Eastern Denmark blackout of September 2003, the Italian blackout of September 2003, the Russia blackout of May 2005, and the north-eastern Indian blackout of July 2012 shows the requirement of good and accurate power system controller. Maintaining frequency and power interchanges with neighboring control areas at the scheduled values are the two main primary objectives of a power system LFC. These objectives are met by measuring a control error signal, called the area control error (ACE), which represents the real power imbalance between generation and load, and is a linear combination of net interchange and frequency deviations. The LFC problem has been augmented with the valuable research contributions from time to time, like LFC/AGC regulator designs incorporating parameter variations/uncertainties, load characteristics, excitation control, and parallel ac/dc transmission links [4]. The small signal analysis is justified for studying the system response for small perturbations. However, the implementation of AGC strategy based on a linearized model does not necessarily ensure the stability of the nonlinear system. Considerable attention has been paid by researchers to consider the system nonlinearities to develop a robust controller.

II. LITERATURE REVIEW

[Hasmaini Mohamad] This paper presents a development of Power System Load Flow Analysis

tool based on the Newton Raphson method by using a user Friendly Graphical User Interface (GUI) MATLAB Program. This tool introduces a simple interface for the user to perform load flow analysis. It is also designed for a user to view power flow results for each iteration and thus will facilitate especially undergraduate electrical students to verify their manual calculation of load flow solution.

[Md Razuan Hossain] In this work, an attempt has been made to solve network flow optimization problem using Genetic Algorithm (GA) and load flow analysis by Newton Raphson method for a IEEE 9 bus system. The numerical analysis has been done in MATLAB and results showed that the proposed approach has been used to find the optimal operating point of the power system network.

[Jianqiang Hu] This paper presents a distributed pinning demand side control (DSC) strategy for coordinating multiple load aggregators, i.e., aggregated responsive

loads, to provide frequency regulation services. Specifically, a leader-following communication protocol is considered for the load aggregators in which there is a centralized pinner (leader) and multiple load aggregators (followers).

[Sunitha R] In this paper multi-layer feed forward artificial neural network (MLFFN) and radial basis function network (RBFN) are proposed to implement the online module for power system static security assessment.

[Pudi Sekhar] In the present work the Newton Raphson load flow method is used for the power system contingency ranking for the line outage based on the Active power and Voltage performance index.

III. AUTOMATIC LOAD FREQUENCY CONTROL

The successful operation of interconnected power systems requires the matching of total generation with total load demand and associated system losses. With time, the operating point of a power system changes, and hence, these systems may experience deviations in nominal system frequency and scheduled power exchanges to other areas, which may yield undesirable effects. In actual power system operations, the load is changing continuously and randomly [11]. The ability of the generation side to track the changing load is limited due to physical / technical consideration, causing imbalance between the actual and the scheduled generation quantities. This action leads to a frequency variation. The difference between the actual and the synchronous frequency causes mal operation of sophisticated equipment's like power converters by producing harmonics.

IV. LOAD FREQUENCY CONTROL

In an electric power system, Load Frequency Control is a system to maintain reasonably uniform frequency, to divide the load between the generators, and to control the tie-line interchange schedules.

Load Frequency Problem: If the system is connected to numerous loads in a power system, then the system frequency and speed change with the characteristics of the governor as the load changes. If it's not required to maintain the frequency constant in a system then the operator is not required to change the setting of the generator. But if constant frequency is required the operator can adjust the velocity of the turbine by changing the characteristics of the governor when required. If a change in load is taken care by two generating stations running parallel then the complex nature of the system increases. The ways of sharing the load by two machines are as follow:

1) Suppose there are two generating stations that are connected to each other by tie line. If the change in load is either at A or at B and the generation of A is regulated so as to have constant frequency then this kind of regulation is called as Flat Frequency Regulation.

2) The other way of sharing the load is that both A and B would regulate their generations to maintain the frequency constant. This is called parallel frequency regulation.

3) The third possibility is that the change in the frequency of a particular area is taken care of by the generator of that area thereby maintain the tie-line loading. This method is known as flat tie-line loading control.

4) In Selective Frequency control each system in a group is taken care of the load changes on its own system and does not help the other systems, the group for changes outside its own limits.

5) In Tie-line Load-bias control all the power systems in the interconnection aid in regulating frequency regardless of where the frequency change originates.

Mathematical Modeling of a Generator: With the use of swing equation of a synchronous machine to small perturbation, we have

$$\frac{2H}{\omega} \frac{d^2 \Delta \delta}{dt^2} = \Delta P_m - \Delta P_e$$

Or in terms of small change in speed

$$\frac{d\Delta \omega}{dt} = \frac{1}{2H} (\Delta P_m - \Delta P_e)$$

Laplace transformation gives,

$$\Delta \Omega(s) = \frac{1}{2Hs} (\Delta P_m(s) - \Delta P_e(s))$$

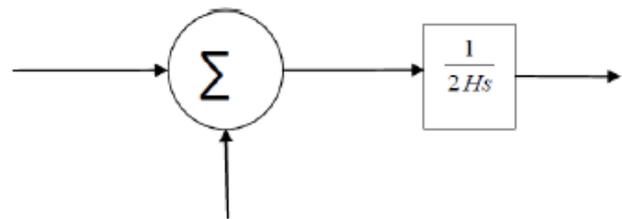


Figure 1: Mathematical modelling block diagram for a generator

The mathematical modelling block diagram for a generator is shown in figure 1

REFERENCES

[1] Hasmainsi Mohamad, Zuhaina Zakaria, Muhamad Zulfakri Bin Mazlan, "Development of GUI Power

- System Load Flow Analysis Tool based on Newton Raphson Method” IEEE 7th International Conference on Engineering Education (ICEED), 2015
- [2] Md Razuan Hossain, M. Shamim Kaiser, Fahmid Iftekher Ali and Md Monjurul Alam Rizvi, “Network Flow Optimization by Genetic Algorithm and Load Flow Analysis by Newton Raphson Method in Power System” 2nd Int’l Conf. on Electrical Engineering and Information & Communication Technology (ICEEICT) 2015
- [3] Jianqiang Hu, Jinde Cao, Josep M. Guerrero, Taiyou Yong and Jie Yu, “Improving Frequency Stability Based on Distributed Control of Multiple Load Aggregators” IEEE Transactions on Smart Grid 2015
- [4] Hou Wei, Yang Yan, Yan Wei, Zhang Chunhe, “Solutions of Electrical Control and Management System for Thermal Power Plant Based on IEC61850” The 2nd IEEE Conference on Power Engineering and Renewable Energy ICPERE 2014
- [5] Manuel Garcia, Annarita Giani, Kameshwar Poolla, “Partial State Estimation for Electricity Grids” 52nd IEEE Conference on Decision and Control December 10-13, 2013
- [6] Pudi Sekhar and Prof. Sanjeeb Mohanty, “Power system contingency ranking using Newton Raphson load flow method” Annual IEEE India Conference (INDICON), 2013
- [7] Sunitha R, R. Sreerama Kumar and Abraham T. Mathew, “Online Static Security Assessment Module using Artificial Neural Networks” IEEE TRANSACTIONS ON POWER SYSTEMS, 2013
- [8] A.G. Phadke J.S. Thorp R.F. Nuqui M. Zhou, “Recent Developments in State Estimation with Phasor Measurements” IEEE Trans Energy Convers., vol. 25, no. 3, pp. 814–820, 2009
- [9] Robert Schainker, Peter Miler, Wadad Dubbelday, Peter Hirsch and Guorui, “Real Time dynamic Security Assessment” IEEE Power Energy Magazine, 2006
- [10] A.K. Al-Othman and M.R. Irving, “Uncertainty modelling in power system state estimation” IEE Proceeding Generation. Transmission. Distribution. Vol. 152, No. 2, March 2005
- [11] Nima Amjady and Masoud Esmaili, “Application of a New Sensitivity Analysis Framework for Voltage Contingency Ranking” IEEE Transactions on Power Systems, Vol. 20, No. 2, MAY 2005
- [12] N. Yorino, H. Q. Li, S. Harada, A. Ohta, and H. Sasaki, “A Method of Voltage Stability Evaluation for Branch and Generator Outage Contingencies” IEEE Transactions on Power Systems Vol. 19, No. 1, February 2004
- [13] T. Jain, L. Srivastava, and S. N. Singh, “Fast Voltage Contingency Screening Using Radial Basis Function Neural Network” IEEE Transactions on Power Systems 18, Vol. 18, No. 4, November 2003
- [14] Ming Ni, James D. Mc Calley, Vijay Vittal and Tayyib Tayyib. “Online Risk-Based Security Assessment” IEEE Transactions on Power Systems, Vol. 18, No. 1, February 2003
- [15] Craig A. Jensen, Mohamed A. El-Sharkawi, and Robert J. Marks, “Power System Security Assessment using Neural Networks: Feature Selection Using Fisher Discrimination” IEEE Transactions on Power Systems, Vol. 16, No. 4, November 2001
- [16] A. Monticelli, “Electric Power System State Estimation” IEEE Proceedings of the IEEE, Vol. 88, NO. 2, February 2000
- [17] Hirotaka Yoshida, Kenichi Kawata, Yoshikazu Fukuyama, Shinichi Takayama, and Yosuke Nakanishi. “A Particle Swarm Optimization for Reactive Power and Voltage Control Considering Voltage Security Assessment” IEEE Transactions on Power Systems, Vol. 15, No. 4, November 2000
- [18] T.A. Mikolinnas and B. F. Wollenberg, “An Advanced Contingency Selection Algorithm” IEEE Transactions on Power Apparatus and Systems, Vol. PAS-100, No. 2, February 1981
- [19] Fred C. Schweppe,” Power System Static-State Estimation: Implementation” Transactions on Power Apparatus and Systems, Vol. Pas-89 No. 1, January 1970
- [20] Venkataramana Ajarapu and Colin Christy “The Continuation Power Flow a Tool for Steady State Voltage Stability Analysis” Transactions on Power Systems, Vol. 7, No. 1. February 1992
- [21] B. H. Lee and K. Y. Lee, "A Study on Voltage Collapse Mechanism in Electric Power Systems," IEEE Transactions on Power Systems, Vol. 6, pp. 966-974, August 1991.
- [22] Narain G. Hingorani, Laszlo Gyugyi Understanding FACTS: Concepts and Technology of Flexible AC Transmission Systems, Wiley-IEEE Press, December 1999
- [23] Kundur, P., Power System Stability and Control, McGraw-Hill, Inc., New York, 1994
- [24] Bergen, A.R., Vittal, V., Power Systems Analysis, Prentice-Hall, Inc, New Jersey, 2nd edition, 2000
- [25] Sauer, P. W., Pai, M. A., Power System Dynamic and Stability, Prentice-Hall, Inc. New Jersey, 1998
- [26] Pouyan Pourbeik and Michael J. Gibbard, “Simultaneous Coordination of Power System Stabilizers and FACTS Device Stabilizers in a Multimachine Power System for Enhancing Dynamic Performance” IEEE Transactions on Power Systems, Vol. 13, No. 2, May 1998